

XRJB Series RJ45 over Stacked USB Integrated Magnetics



The XMULTIPLE XRJB Series RJ45 connectors with integrated LEDs and magnetics over two stacked ports for USB connectors. The XRJB combo USB/RJ45 is designed as a single package for desktop computers, printers, and other electronic products that have space limitations. The XRJB Combo connector with integrated LEDs is provided as a thru-hole PC board mount. The shield consists of copper alloy base metal with tin-lead plating and copper under plating. The RJ45 jack contacts are overall nickel-plated phosphor bronze, with plated gold in the contact area and tin-lead in the solder area. LEDs and optional magnetics integrated into the combo connector reduce space requirements required for indicators. The LEDs are offered in a variety of color combinations.

Two USB Port and One RJ45/LED Modular Jacks with a Thru-Hole mount are provided shielded with or without panel grounds.

The XRJB Series is designed with a compact profile for a reduced assembly. This product is ideal for devices that have limited space and clearance on a printed circuit board. The XRJB housing consists of a strong construction assuring proper contact and attachment to the printed circuit board.

The XRJB Series is a perfect solution for PC motherboards and networking products. Xmultiple offers versions of this connector with and without the spring tabs.

Features and Benefits

- Combo USB/RJ45 connectors with LED for thru-hole mounting to PCB
- LEDs integrated directly into jack and maintains compact form requires less space. LEDs provided in a variety of color options
- LEDs located at top of jack for effective visibility
- Type A USB Stacked Connectors
- Custom 10/100/1000 Mbps Magnetics Options Available
- Shielded jacks provide grounding through plane and PC Board
- Reduced labor cost for PCB assembly
- Gold plating and solder tails
- Conforms to IEEE 802.3

LED MODULAR JACK SPECIFICATIONS

Electrical- RJ45

- **Current Rating** - 1.5 amp max. at 25°C
- **Voltage Rating** - 150 VAC max.
- **Dielectric Withstanding Voltage** – 1000 VAC
- **Insulation Resistance** – 500 megohms min.
- **Shielding Effectiveness** - 20dB min., 10 to 200 MHz

Electrical- USB

- **Contact Current Rating** – 1A max.
- **Contact Resistance** – 30 milliohms max.
- **Voltage Rating** – 30V AC
- **Dielectric Withstanding Voltage** – 750V AC
- **Insulation Resistance** – 1000 megohms min.
- **Shielding Effectiveness** - 20dB min., 10 to 200 MHz

Mechanical

- **Durability** - 1500 mating cycles min.
- **Mating Forces** – 3.5kg Max
- **Unmating Forces** – 1.0kg Max
- **Operating Temperature** - -40°C to 70°C

Material & Finish

- **Housing** - High temperature Nylon, Black, UL 94V-0 rated.
- **Contact** - 0.33 [.013] Phosphor bronze, plated 0.00127 [.000050] gold in localized area and 0.00381 [.000150] tin-lead on solder tails, over 0.00127 [.000050] nickel underplate
- **Shield** - 0.25 [.010] copper alloy, tin-lead plated


ORDERING INFORMATION

XRJB-S-1-86UA-X

Combo USB/RJ/LED Connector

part Number dash Options

S -X-86-UA -X

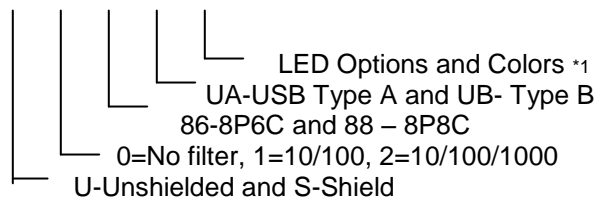

NOTE: *1 LED Color Chart Available

XMULTIPLE Technologies, Inc.

1060 Los Angeles Avenue • Simi Valley, CA 93065 USA
805) 579-1100 • FAX: (805) 579-7800 www.xmultiple.com

XMULTIPLE reserves the right to modify or discontinue this product without notice. Specifications and pricing subject to change without notice. Various trademarks are property of their respective corporations

XMULTIPLE

CONNECTING
THE INFORMATION
AGE