

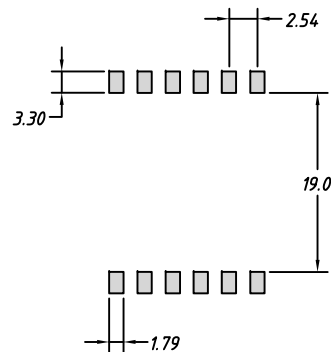





Mechanical Dimensions : (mm)

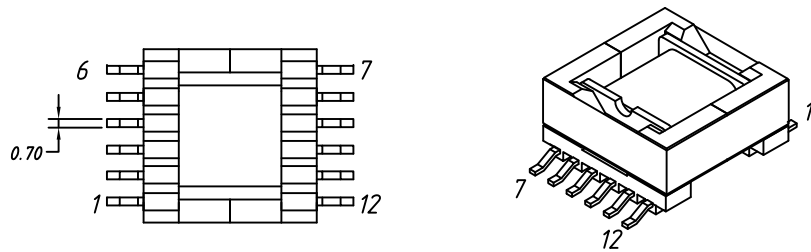

Recommended PCB Layout

Coil structure and schematic

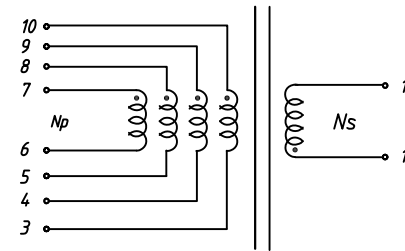

Electrical Specifications:

- Inductance : L_{3,4,5,6-7,8,9,10} = 10.0uH ±10% @100KHz 0.1V
- L(3A)_{3,4,5,6-7,8,9,10} = 9.0uH MIN @100KHz 0.1V
- L_{kg(3,4,5,6-7,8,9,10)} = 0.144uH MAX @100KHz 0.1V (shorted 1,12)
- RDC : R_p = 15.0 mOhm Max
- R_s = 1.10 Ohm Max
- Hi-Pot : N_p-N_s : 500VAC/1mA/60Second
- Turns Ratio: N_p:N_s=1:10 ±2%.



Model: Transformer

Customer P/N: DA2033-AL

Xmultiple P/N: XF-1207016

DOCUMENT NO. /Rev.: 01

Unless Otherwise Specified
 TOLERANCES: .X : ±0.50
 .XX : ±0.25
 Dimensions in mm

DWN .
 CHK .
 APP .

Yang Yi
 Toby Du
 Louis Lin

DATE: Jul./11/2012

Note : Temp 20°C 48% RH. RoHS compliant.

PROPRIETARY

Document is the property of Xmultiple Inc & is not allow to be duplicated without authorization