

1 2 3 4 5 6 7 8

A




B

C


D

E

F

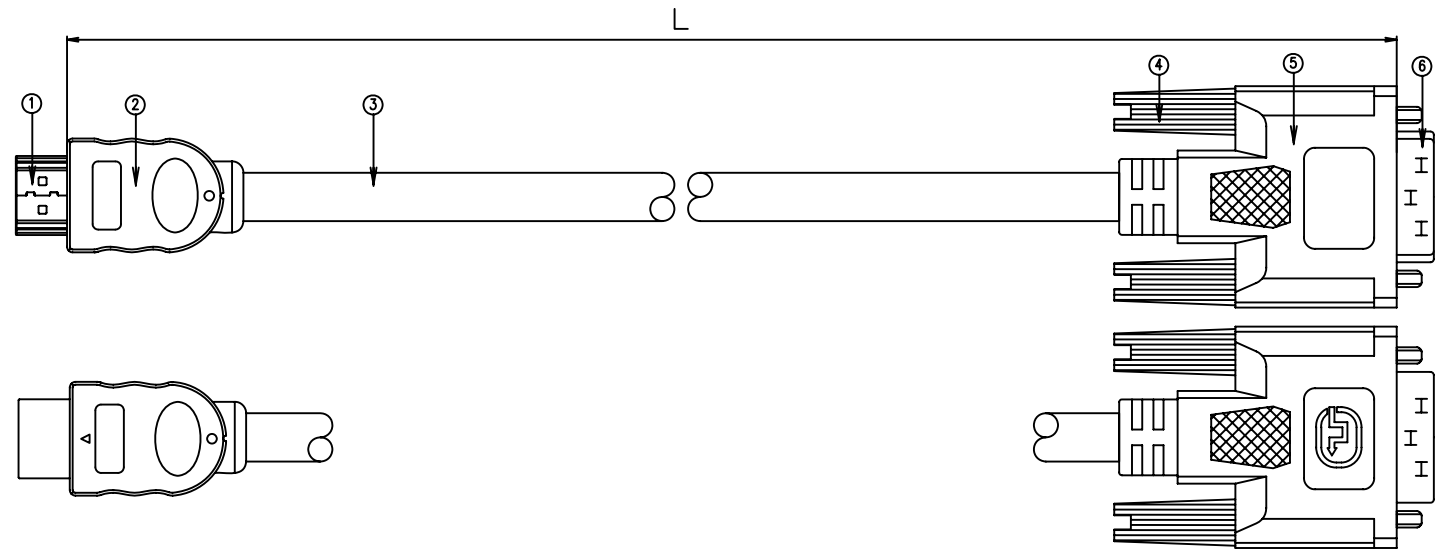

PINOUT DIAGRAM

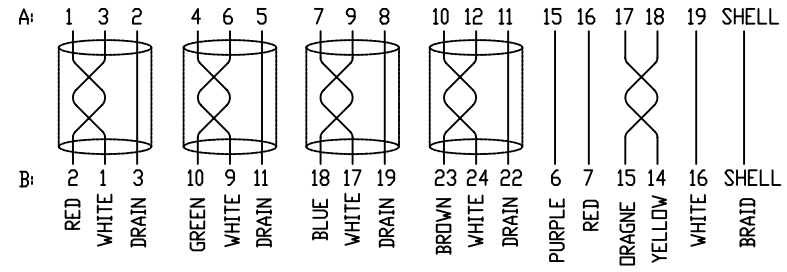

NOTE

1. 100% OPEN/SHORT TEST.
2. CONTACT RESISTANCE: $\leq 2\Omega$
3. INSULATION RESISTANCE: $\geq 10M\Omega$ DC 300V AT 10ms

RoHS Compliant

NO.	DESCRIPTION	Q'TY
6	DVI-D (18+1) MALE CONN: G/F, INSULATOR: BLACK, SHELL: NICKEL	1
5	PVC HOOD: IN BLACK(45P)	1
4	THUMB SCREW #4-40/AF40*32.8TNPL35A, COLOR: BLACK, (GOLD PLATED)	2
3	UL20276 (1P*30AWG+D+F-E-AL)*4C+1P*30AWG+5C*30AWG+AL+B, OD=5.5, IN BLACK	1
2	MOLDING PVC: IN BLACK(45P)	
1	HDMI 19P MALE CONN: G/F, INSULATOR: BLACK, SHELL: NICKEL	1

X MULTIPLE

CONNECTING THE INFORMATION AGE

XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu, Taipei, Taiwan 11475	XMULTIPLE ASIA 1420 Los Angeles Ave., Suite G Sini Valley, CA 93065	CUSTOMER/NO:
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG NO: XHDMI-C1-XXX-W
TITLE: Cable: HDMI 19 PIN, M TO DVI-D(18+1), M		DRAWN: TOM
PART NO: XHDMI-C1-XXX-W		CHKD: JEFF
DIMENSIONS mm[inch]	SHEET 1 of 1	REV 01
DATE: Jul,23,07		

1 2 3 4 5 6 7 8