


PINOUT DIAGRAM

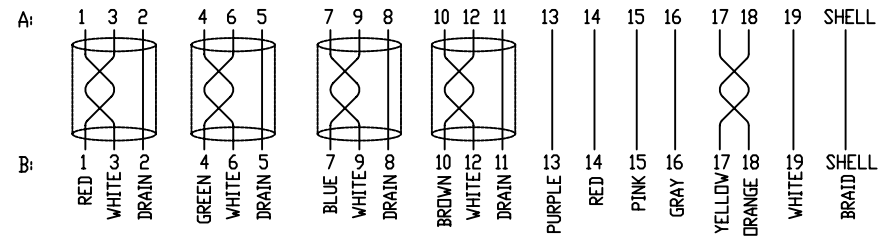

NOTE

- 100% OPEN/SHORT TEST.
- CONTACT RESISTANCE: $\leq 2\Omega$
- INSULATION RESISTANCE: $\geq 10M\Omega$
DC 300V AT 10ms

RoHS Compliant

NO.	DESCRIPTION	Q'TY
3	UL20276 (1P*30AWG+D+F-E-AL)*4C+1P*30AWG+5C*30AWG+AL+B, OD=5.5, COLOR IN BLACK	1
2	MOLDING PVC HOOD: IN BLACK(45P)	
1	HDMI 19P MALE CONN: G/F, INSULATOR: BLACK, SHELL: NICKEL	2

X MULTIPLE		CONNECTING THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu, Taipei, Taiwan 11475		XMULTIPLE ASIA 1420 Los Angeles Ave., Suite G Simi Valley, CA 93065	
THIS DRAWING IS A CONTROLLED DOCUMENT.		CUSTOMER/NO:	
TITLE: Cable: HDMI 19 PIN(M) TO HDMI 19 PIN(M)		DWG NO: XHDMI-C2-XXX-W	
PART NO: XHDMI-C2-XXX-W		DRAWN: TOM	
		DIMENSIONS	SHEET
		mm[inch]	1 of 1
		REV	DATE:
		01	Jul,23,07