

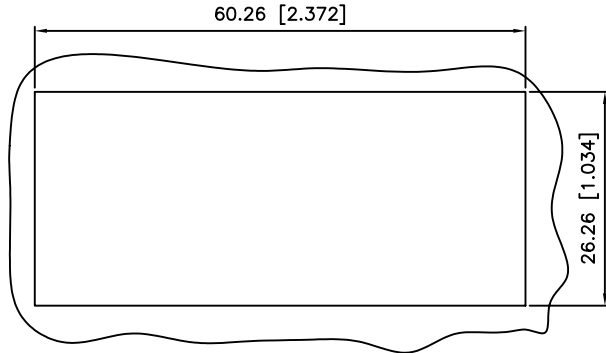
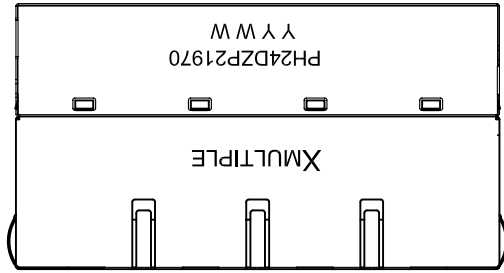


1. MECHANICAL DIMENSIONS :


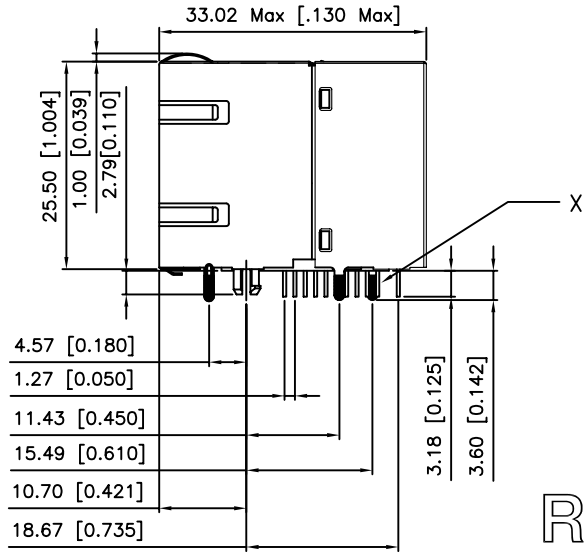


RECOMMENDED
PANEL CUTOUT DIMENSION

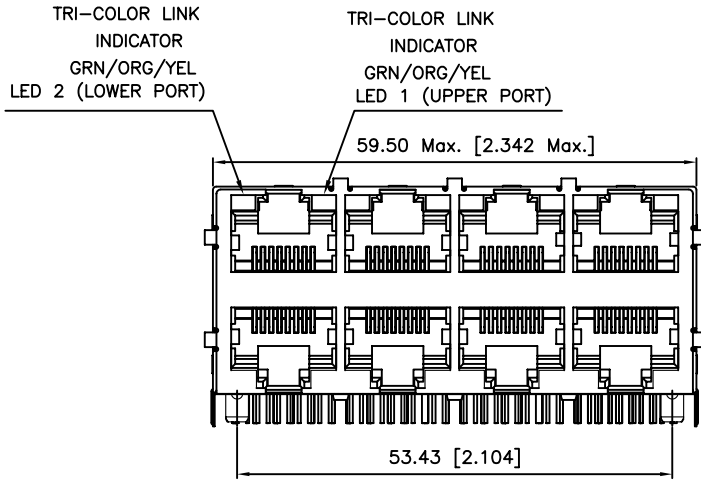

- NOTES:
1. MATERIAL:
HOUSING-PBT POLYESTER UL-94V-0
MIXED GLASS FIBER.
STANDARD COLOR-BLACK
CONTACTS-0.35mm THICK PHOS-BRONZE PLATED
WITH 15u" GOLD AND TIN IN
SOLDER AREA, AND NICKEL
PLATING IN ALL AREA.
SHIELD- SUS301 T=0.20 mm WITH TIN ON
TERMINATION END.
 2. OPERATING TEMPERATURE: 0°C~+70°C
 3. CAVITY CONFORMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.
 4. UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]


RECOMMENED PLUG DIMENSION:

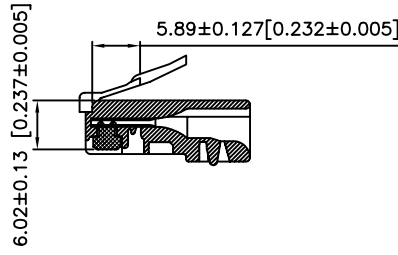

RoHS Compliant

X MULTIPLE		CONNECTING THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347,Yong Guang St., Neihu, Taipei, Taiwan 11475		XMULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065	
THIS DRAWING IS A CONTROLLED DOCUMENT.		G/NO:	
TITLE: Stacked RJ45, W/LED, with 10/100/1000 Mbps LAN Magnetics 8P,10C, Shielded, Thru Hole, FOR P.O.E.		DWG NO: XPJH-24D-Z-P21-970-MHF	
PART NO: XPJH-24D-Z-P21-970-MHF		DRAWN: RUNES	
		UNIT mm[inch]	SHEET 1 of 3
		REV 01	DATE: Mar.17,08


2. PCB LAYOUT :

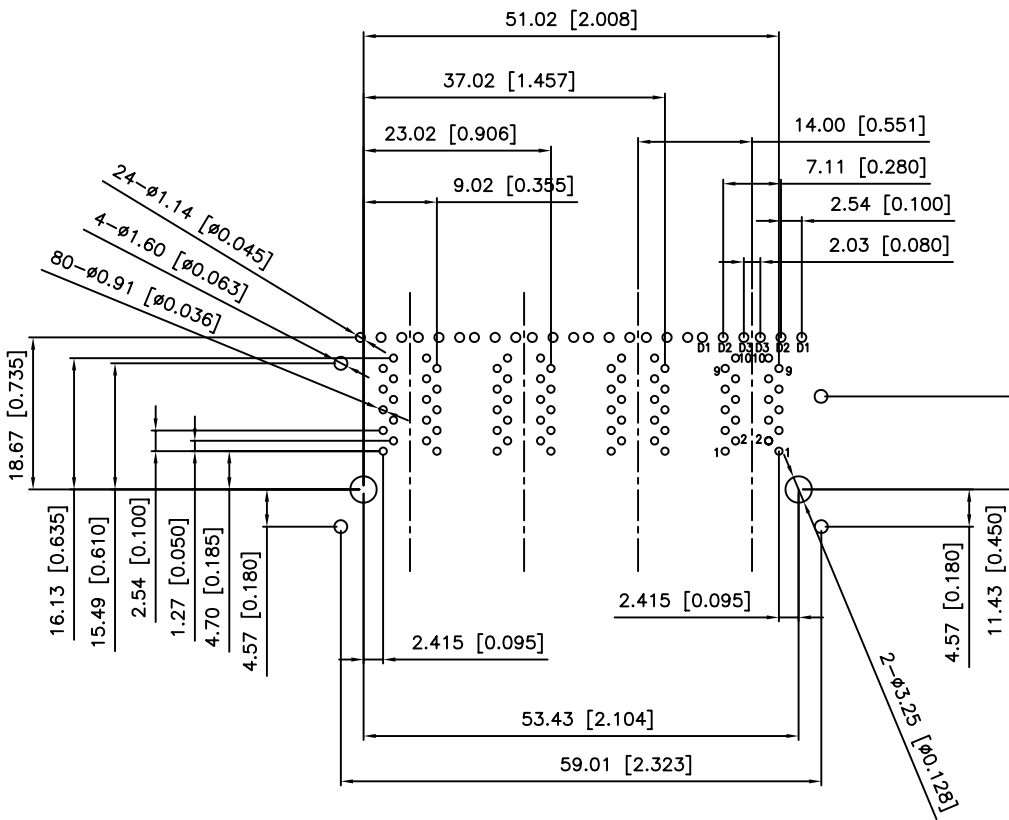

SUGGESTED PCB LAYOUT
TOP VIEW


DIMENSIONAL TOLERANCE: .XX ±0.08[0.003]

3. LED CONFIGURATION :

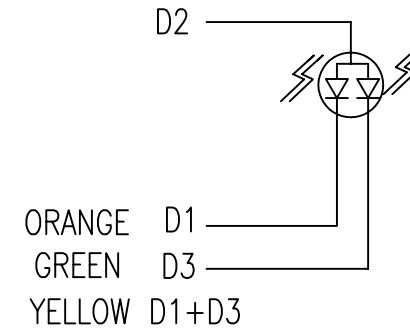

Color	Lens Color	Vf(v) @20mA		Iv(mcd) @10mA		Viewing angle 2θ 1/2	If (mA)	Peak wave Length λ(Pnm)
		Min	Max	Min	Typ			
Orange	White Diffused	1.7	2.6	1.8	4.0	116	20	610
Green		1.7	2.8	3.5	6.0	116	20	568


RoHS Compliant

XMULTIPLE			CONNECTING THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu, Taipei, Taiwan 11475		XMULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065		G/NO:
THIS DRAWING IS A CONTROLLED DOCUMENT.				DWG NO: XPJH-24D-Z-P21-970-MHF
TITLE: Stacked RJ45, W/LED, with 10/100/1000 Mbps LAN Magnetics 8P,10C, Shielded, Thru Hole, FOR P.O.E.				DRAWN: RUNES
PART NO: XPJH-24D-Z-P21-970-MHF				CHKD: JEFF
		UNIT mm[inch]	SHEET 2 of 3	REV 01
				DATE: Mar.17,08

LAN CHIP SIDE

RJ CABLE SIDE

PINS:(J1,J2),(J3,J6)=1.2 OHMS MAXIMUM

 CUSTOMER CODE

compliant

XPJH-24D-Z-P21-970-MHF

XPJH-24D-Z-P21-970-MHF

Mar.17.08