

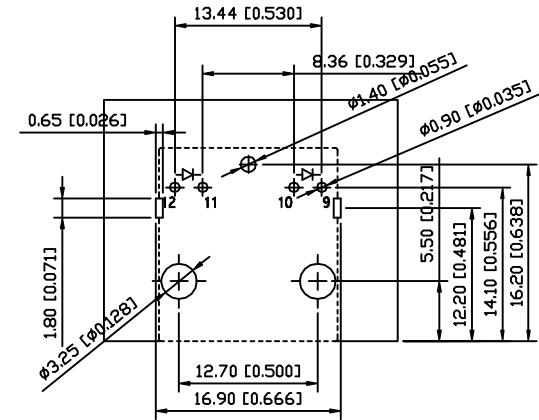



REVISIONS					
ECO	ZONE	REV	DESCRIPTION	DATE	APPROVED
		B1	REVISED RELEASE	06/14/01	H.S. Liu

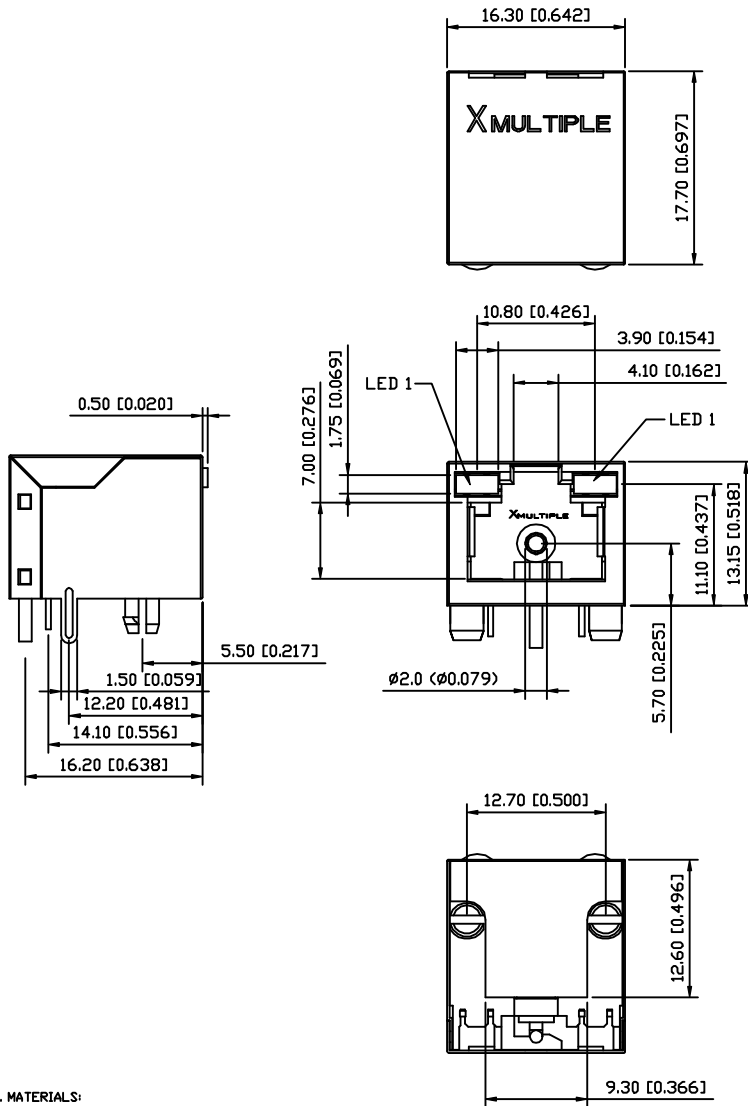

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)




BI-COLOR LED DETAIL
(RED, RED/YELLOW, GREEN/ORANGE LED'S ARE ALSO AVAILABLE)

1. MATERIALS:
HOUSING: HIGH TEMP. THERMOPLASTIC, BLACK, UL 94V-0

CONTACTS:
FRONT CONTACTS DIAMETER ϕ 0.070 INCHS (2.0 MILLIMETERS) THICK PHOSPHOR BRONZE PLATED WITH 15 MICRONS (0.38 MICROMETERS) MINIMUM HARD GOLD
BACK CONTACTS DIAMETER ϕ 0.047 INCHS (1.20 MILLIMETERS) THICK PHOSPHOR BRONZE PLATED WITH 150 MICRONS (3.81 MICROMETERS) MINIMUM THICK TIN
SHIELD: 0.007 INCHES (0.20 MILLIMETERS) THICK COPPER ZINC ALLOY PLATED WITH 30 MICRONS (0.762 MICROMETERS) MINIMUM THICK NICKEL

2. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F
3. PART NUMBER: XRJAX-5101-X

REFER TO LED OPTIONS TABLE FOR ORDERING CODES

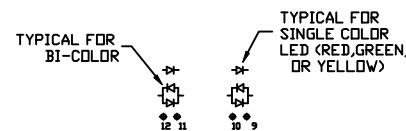

LED SCHEMATIC

NOTES: UNLESS OTHERWISE SPECIFIED
UNSPECIFIED TOLERANCE: .XX \square 0.25 [0.010]
.X \square 0.30 [0.012]

X MULTIPLE		CONNECTING THE INFORMATION AGE	
X MULTIPLE AREA 507 No. 60, Julian St. Taipei, Taiwan 10488, R.O.C.		X MULTIPLE USA 8888 Old Converse Road Newport News, VA 23606	
THIS DRAWING IS A CONTROLLED DOCUMENT.			
TITLE: XRJAX PC BOARD CONNECTOR W/LED		DRAWN: Y. Chen	
PART NO: XRJAX-5101-X		CHECKED: E. KOLLAR	
DATE: 9/10/02		REV: B1	
DIMENSIONS: M M		SHEET: 1 of 1	