

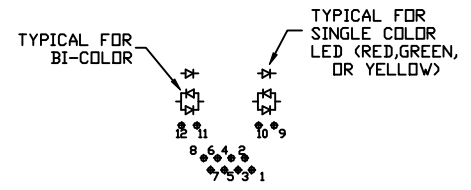
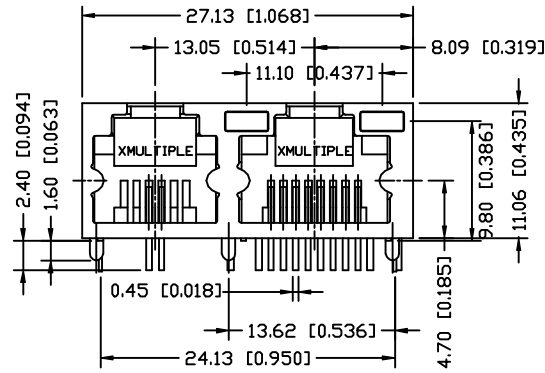
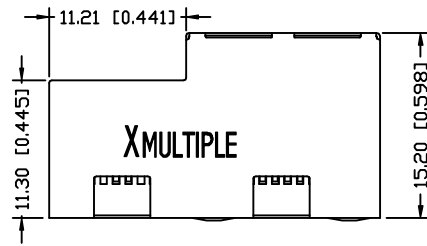



PCB LAYOUT
(COMPONENT SIDE)

PCB LAYOUT
TOLERANCE
.XX±0.05[0.002]

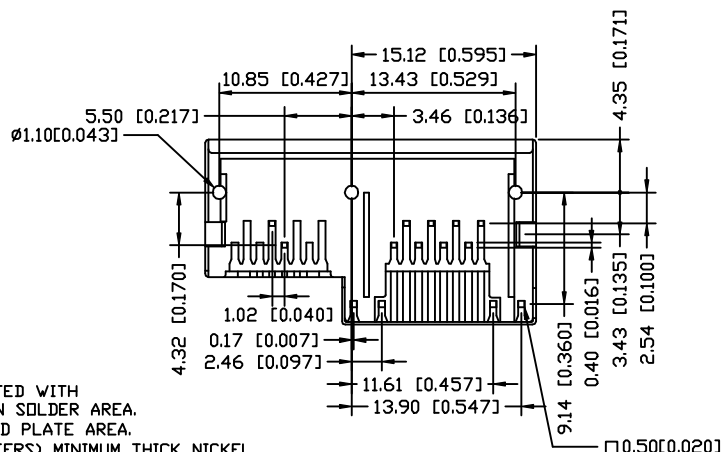

LED SCHEMATIC

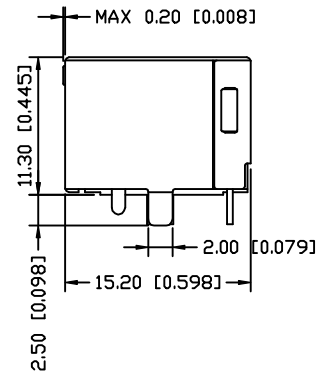

BI-COLOR LED DETAIL
(RED, RED/YELLOW, GREEN/DRANGE LED'S ARE ALSO AVAILABLE)

- MATERIALS:
HOUSING: HIGH TEMP. THERMOPLASTIC, BLACK, NYLON
CONTACTS: 0.014 INCHES (0.35 MILLIMETERS) THICK PHOSPHOR BRONZE PLATED WITH 150 MICROINCHES (3.81 MICROMETERS) MINIMUM THICK TIN LEAD IN SOLDER AREA. 15 MICROINCHES (0.38 MICROMETERS) MINIMUM GOLD IN LOCALIZED PLATE AREA. ENTIRE CONTACTS PLATED WITH 50 MICROINCHES (1.27 MICROMETERS) MINIMUM THICK NICKEL.
SHIELDED: 0.0098 INCHES (0.25 MILLIMETERS) THICK COPPER ZINC ALLOY PLATED WITH 30 MICROINCHES (0.762 MICROMETERS) MINIMUM THICK NICKEL

2. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F

3. PART NUMBER: XRJC-S-4511T-X
REFER TO LED OPTIONS TABLE FOR ORDERING CODES

NOTES: UNLESS OTHERWISE SPECIFIED
UNSPECIFIED TOLERANCE: .XX±0.25[0.010]
.Xi±0.30[0.012]

X MULTIPLE		CONNECTING THE INFORMATION AGE	
X MULTIPLE USA 571 No. 60, Julian St., Folsom, CA 95630, USA		X MULTIPLE USA 5556 Old Connel Road Hawthorne Park, CA 91320	
THIS DRAWING IS A CONTROLLED DOCUMENT.			
TITLE: RJ45 w/LED+RJ11 Connector, Shielded, Thru Hole		DRAWN: VIK	
PART NO: XRJC-S-4511T-X		CHKD: E. KOLLAR	
DIMENSIONS: mm [Inch]		SHEET: 1 of 1	
		REV: C	
		DATE: 9/10/02	