

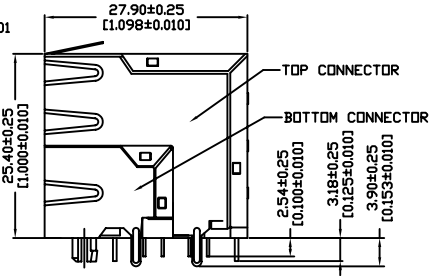


FRONT VIEW

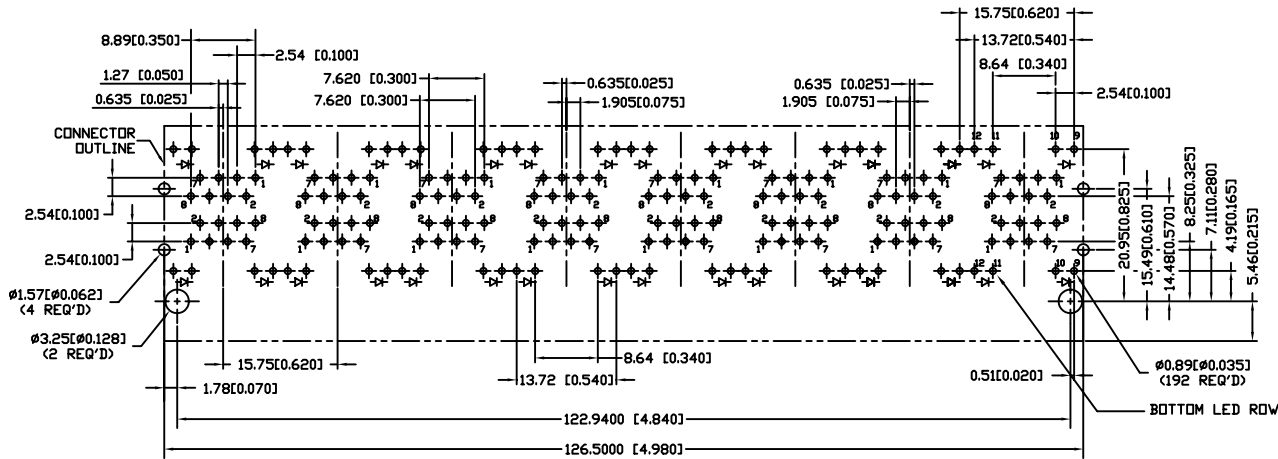


SIDE VIEW

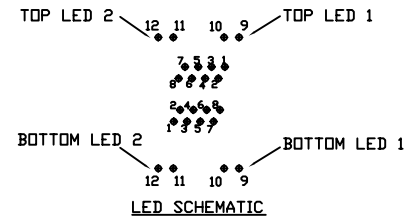

SUGGESTED PCB LAYOUT TOLERANCE .XX±0.05[0.002]

XMULTIPLE PART NUMBER

XRJD-S-28-8-8-W11

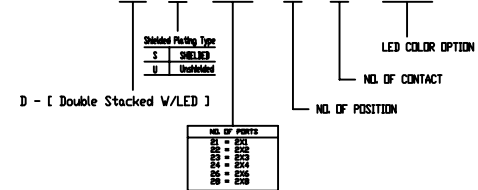

NOTES:

- MATERIALS:**
HOUSING: HIGH TEMP. THERMOPLASTIC, BLACK, UL 94V-0
CONTACTS: 0.014 INCHES (0.35 MILLIMETERS) THICK PHOSPHOR BRONZE PLATED WITH 150 MICROINCHES (3.81 MICROMETERS) MINIMUM THICK TIN LEAD IN SOLDER AREA. 15 MICROINCHES (0.38 MICROMETERS) MINIMUM GOLD IN LOCALIZED PLATE AREA. ENTIRE CONTACTS PLATED WITH 50 MICROINCHES (1.27 MICROMETERS) MINIMUM THICK NICKEL.
SHIELDED: 0.0098 INCHES (0.25 MILLIMETERS) THICK COPPER ZINC ALLOY PLATED WITH 30 MICROINCHES (0.762 MICROMETERS) MINIMUM THICK NICKEL
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F
- PART NUMBER: XRJD-S-28-8-8-X
REFER TO LED OPTIONS TABLE FOR ORDERING CODES
- UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]

<h1>XMULTIPLE</h1>			CONNECTING THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu Chiu, Taipei 114, Taiwan 11475		XMULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065		CUSTOMER/NO:
THIS DRAWING IS A CONTROLLED DOCUMENT.				
TITLE: Stacked RJ45, Connectors, W/LED,8P,8C, Shielded, Thru Hole, 2 Piece Structure			DWG NO:	XRJD-S-28-8-8-W11
PART NO: XRJD-S-28-8-8-W11			DRAWN:	LEON
			CHKD:	TARA
		DIMENSIONS	SHEET	REV
		mm[inch]	1 of 1	01
			DATE:	08/04/05