


SUGGESTED PCB LAYOUT PCB LAYOUT TOLERANCE
TOP VIEW .XX±0.05[0.002]

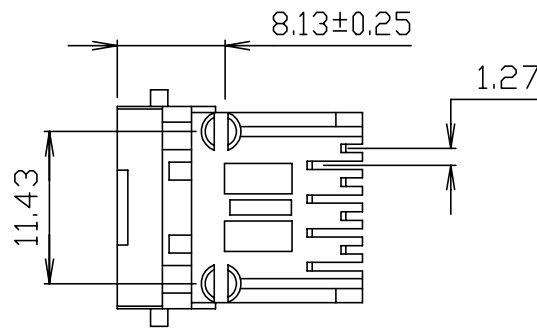

NOTES:

- MATERIAL: HOUSING-PBT POLYESTER UL94V-0
MIXED GLASS FIBER.
STANDARD COLOR-BLACK
TERMINAL-0.35mm THICK PHOS-BORNZE
PLATED WITH 50u" GOLD AND
TIN/LEAD IN SOLDER AREA.
SHIELD-0.25mm THICK COPPER ALLOY,
PLATED WITH TIN/LEAD.
- CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.
- UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]

	CODE	LED 2 [LEFT]	LED 1 [RIGHT]
☆	0	BLOCKED	BLOCKED
	1	YELLOW	GREEN
	2	BLOCKED	GREEN
	3	YELLOW	BLOCKED
	4	GREEN	YELLOW
	5	GREEN	GREEN
	6	YELLOW	YELLOW
	7	OR/GR	OR/GR
	8	YE/GR	YE/GR
	9	OR/GR	YELLOW

<h1>X MULTIPLE</h1>		CONNECTING THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu Chiu, Taipei, Taiwan 11475		XMULTIPLE USA 543 Country Club Drive #B 12B Simi Valley, CA 93065	
CUSTOMER/NO: 9663-8813		DWG NO: XRJK-S-01-8-8-0-929	
THIS DRAWING IS A CONTROLLED DOCUMENT.			
DRAWN: TARA		CHKD: FUTIEN	
PART NO: XRJK-S-01-8-8-0-929		DATE: 31/05/04	
		DIMENSIONS mm[inch]	SHEET 1 of 1
		REV 01	