
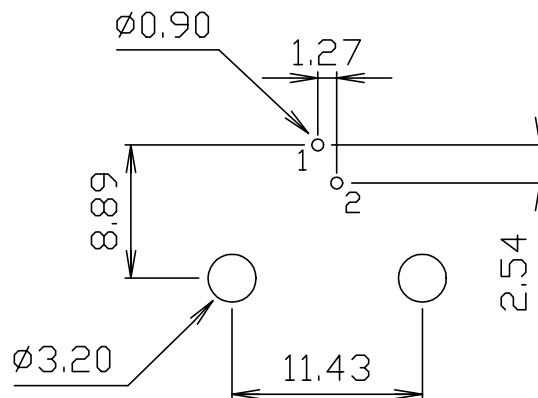


DETAIL X



SUGGESTED PCB LAYOUT
 TOLERANCE
 .XX±0.05[0.002]

NOTES:

1. MATERIALS:
 HOUSING-PBT POLYESTER UL94V-0
 MIXED GLASS FIBER.
 STANDARD COLOR-BLACK
 CONTACTS-0.45mm DIA. ROUND PHOS-BRONZE
 PLATED WITH 30u" GOLD.
2. CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
 PART 68,SUBPART F.
3. UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
 .X ±0.30[0.012]

X MULTIPLE			CONNECTING THE INFORMATION AGE
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu City, Taipei, Taiwan 11475	XMULTIPLE USA 543 Country Club Drive #B 128 Simi Valley, CA 93065	CUSTOMER/NO:	
THIS DRAWING IS A CONTROLLED DOCUMENT.			DWG NO: XRJK-U-01-6-2-0-902
TITLE: RJ11 Connectors, W/OLED,6P,2C, Unshielded, Thru-Hole			DRAWN: TARA
PART NO: XRJK-U-01-6-2-0-902			CHKD: C. TSAI
			DATE: 12/12/03'
DIMENSIONS	SHEET	REV	
mm[inch]	1 of 1	01	