
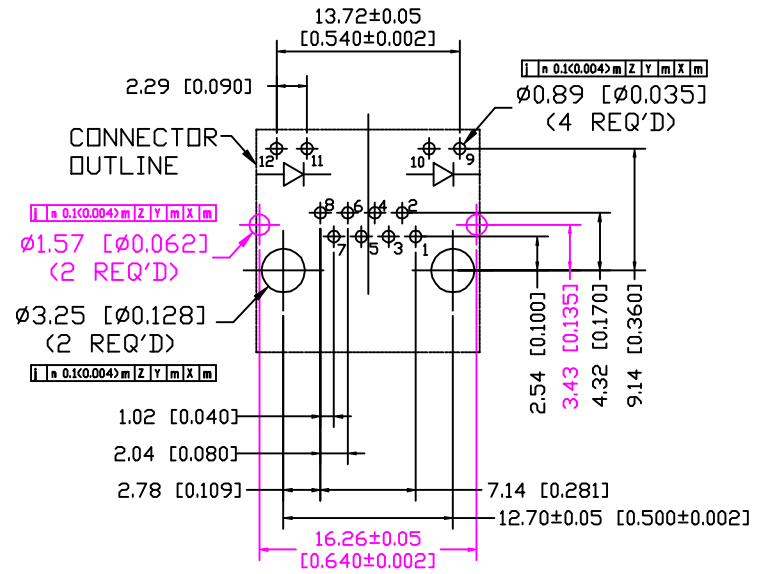
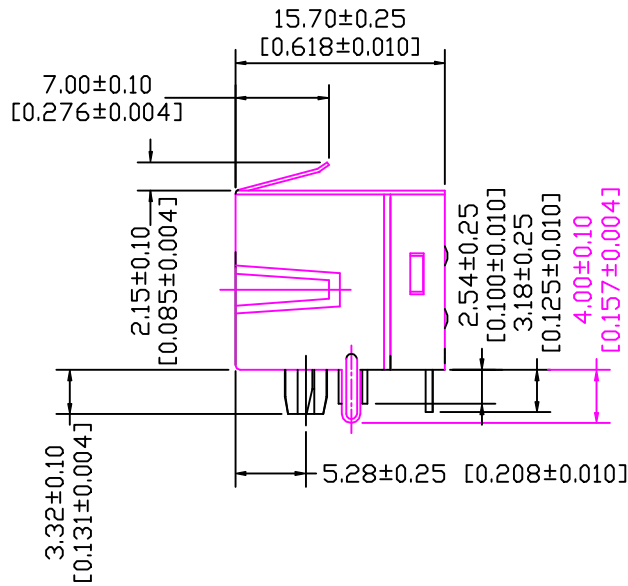
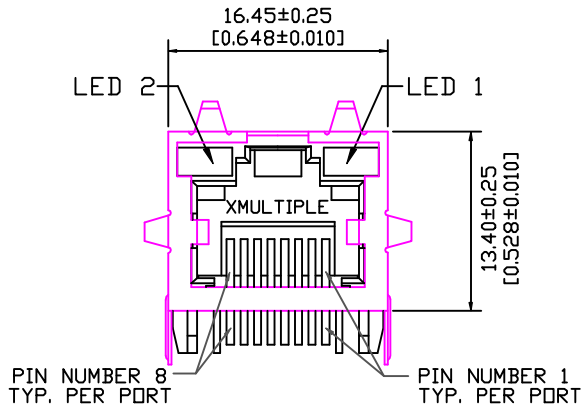


BI-COLOR LED DETAIL
 (RED, RED/YELLOW, GREEN/ORANGE LED'S ARE ALSO AVAILABLE)

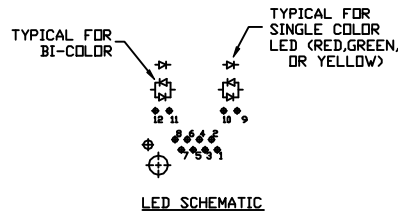

SUGGESTED PCB LAYOUT
 (COMPONENT SIDE)

PCB LAYOUT
 TOLERANCE
 .XX±0.05[0.002]

- MATERIALS:**
 HOUSING: HIGH TEMP. THERMOPLASTIC, BLACK, UL 94V-0
 CONTACTS: 0.014 INCHES (0.35 MILLIMETERS) THICK PHOSPHOR BRONZE PLATED WITH 150 MICRONS (3.81 MICROMETERS) MINIMUM THICK TIN LEAD IN SOLDER AREA. 15 MICRONS (0.38 MICROMETERS) MINIMUM GOLD IN LOCALIZED PLATE AREA. ENTIRE CONTACTS PLATED WITH 50 MICRONS (1.27 MICROMETERS) MINIMUM THICK NICKEL.
 SHIELDED: 0.0098 INCHES (0.25 MILLIMETERS) THICK COPPER ZINC ALLOY PLATED WITH 30 MICRONS (0.762 MICROMETERS) MINIMUM THICK NICKEL
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F
- PART NUMBER: XRJ-S-01-8-8-X
 REFER TO LED OPTIONS TABLE FOR ORDERING CODES

NOTES: UNLESS OTHERWISE SPECIFIED
 UNSPECIFIED TOLERANCE: .XX ± 0.010 [0.25]
 .X ± 0.006 [0.15]

XMULTIPLE		CONNECTING THE INFORMATION AGE	
XMULTIPLE ASIA SIP, No. 60, Jinhua St., Taipei, 10466, Taiwan.	XMULTIPLE USA 5000 Old Conajo Road Northridge, CA 91380	DWG NO: PWENF1(0712)	
THIS DRAWING IS A CONTROLLED DOCUMENT.			
TITLE: RJ45 Connectors, w/LED, 8P, 8C, Shielded, Thru-Hole		DRAWN: VIQ	
PART NO: XRJM-S-01-8-8-X-F1		CHKD: C. TSAI	
	DIMENSIONS mm [inch]	SHEET 1 of 1	REV J1
		DATE 07/12/01	