


NOTES:

- MATERIALS:
HOUSING-NYLON ZYTEL FR-50
HEAT DEFLECTION TEMP.255°
BLACK COLOR, UL94V-0
CONTACTS-0.35mm THICK PHOS-BRONZE PLATED
WITH 15U' HARD GOLD AND TIN/LEAD
IN SOLDER AREA.
SHIELD-0.25mm THICK COPPER ALLOY,
PLATED WITH TIN-LEAD OR NICKEL.
- CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.
- UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]

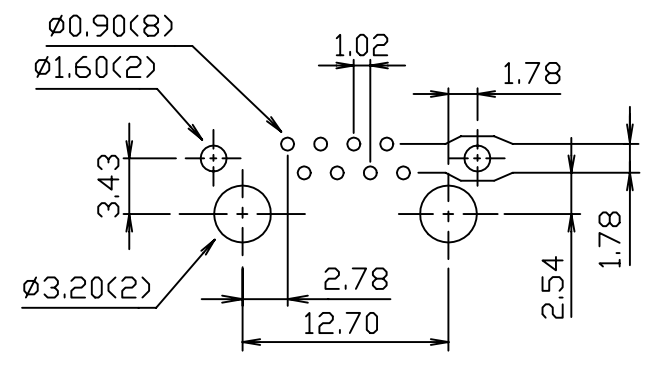

PCB LAYOUT Ref.

<h1>X MULTIPLE</h1>		CONNECTING THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu Chiu, Taipei, Taiwan 11475		XMULTIPLE USA 543 Country Club Drive #B 128 Simi Valley, CA 93065	
THIS DRAWING IS A CONTROLLED DOCUMENT.		CUSTOMER/NO:	
TITLE: RJ45 Connectors, 8P,8C, Shielded, Thru-Hole.		DWG NO: XRJM-S-01-8-8-0-901	
PART NO: XRJM-S-01-8-8-0-901		DRAWN: JEFF	
		CHKD: FUTIEN	
		DATE: 26/11/03'	
DIMENSIONS		SHEET	REV
mm[inch]		1 of 1	01