



SUGGESTED PCB LAYOUT TOP VIEW  
PCB LAYOUT TOLERANCE  
.XX±0.05[0.002]

COPLANARITY:  
THE MAXIMUM DISTANCE (0.10mm)  
BETWEEN LOWEST AND  
HIGHEST PIN WHEN  
BOTTOM OF PART PUT  
ON A FLAT SURFACE

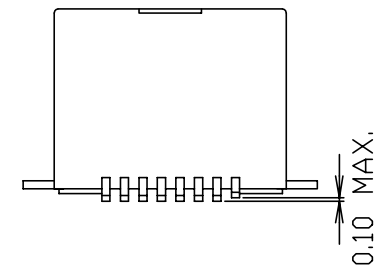

NOTES:

- MATERIALS:
  - HOUSING-DSM STANYL TE250F6 (NYLON-46)  
HEAT DEFLECTION TEMP.290°  
BLACK COLOR,UL94V-0
  - CONTACTS-0.35mm THICK PHOS-BRONZE PLATED  
WITH 50u' GOLD AND TIN/LEAD IN  
SOLDER AREA.
  - SHIELD-0.25mm THICK COPPER ALLOY,  
PLATED WITH TIN-LEAD.
- CAVITY CONFIRMS TO FCC RULES AND REGULATIONS  
PART 68,SUBPART F.
- UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]  
.X ±0.30[0.012]

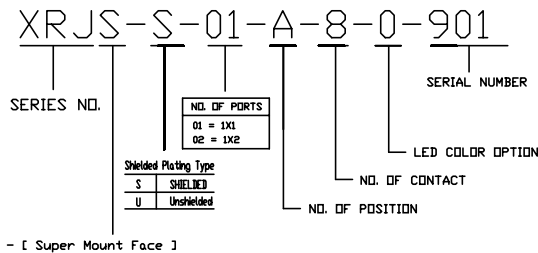

<h1>X MULTIPLE</h1>		CONNECTING THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu Chiu., Taipei, Taiwan 11475		XMULTIPLE USA 543 Country Club Drive #B 128 Simi Valley, CA 93065	
THIS DRAWING IS A CONTROLLED DOCUMENT.		G/NO:	
TITLE: RJ45 Connectors, w/D LED, 10P, 8C, Shielded, SMT TYPE		DWG NO: XRJS-S-01-A-8-0-901	
PART NO: XRJS-S-01-A-8-0-901		DRAWN: TARA	
		CHKD: JEFF	
DIMENSIONS mm[inch]		SHEET 1 of 1	
		REV 01	
		DATE: 13/08/04	