


RECOMMENDED P.C.B. PATTERN LAYOUT

NOTES:

1. MATERIALS :
 HOUSING : PBT+30%GF , BLACK
 CONTACT : PHOSPHOR BROZNE. 30u" GOLD
 SHELL : COPPER ALLOY. Ni PLATED 80u" min
2. MECHANICAL:
 MATING: 35N MAX.
 WITHDRAWAL: 10N MIN.
 DURABILITY: 1500 CYCLES MIN.
3. ELECTRICAL:
 CURRENT: 1.5A MAX
 VOLTAGE: 30V MAX
 WITHSTANDING VOLTAGE: 500V AC
 CONTACT RESISTANCE: 30 mΩ MAX
 INSULATION RESISTANCE: 1000MΩ
4. ENVIRONMENTAL
 TEMPERATURE RANGE -55°C ~ +85°C
5. UNSPECIFIED TOLERANCE: .XX±0.25
 .X ±0.3

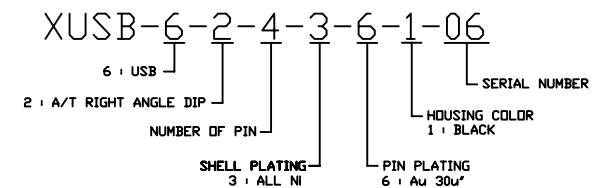

RoHS Compliant

X MULTIPLE		THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu Chiu, Taipei, Taiwan 11475		XMULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065	
THIS DRAWING IS A CONTROLLED DOCUMENT.		G/NO:	
TITLE: USB A TYPE DIP		DWG NO: XUSB-6-2-4-3-6-1-06	
PART NO: XUSB-6-2-4-3-6-1-06		DRAWN: RUNES	
		UNIT: mm[inch]	SHEET: 1 of 1
		REV: 01	CHKD: JEFF
			DATE: Sep.26,06