





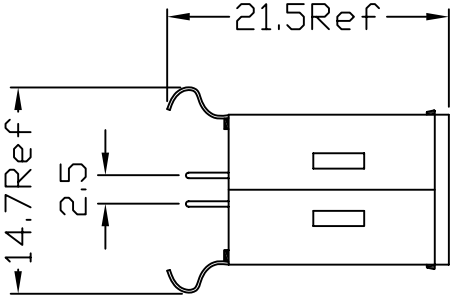

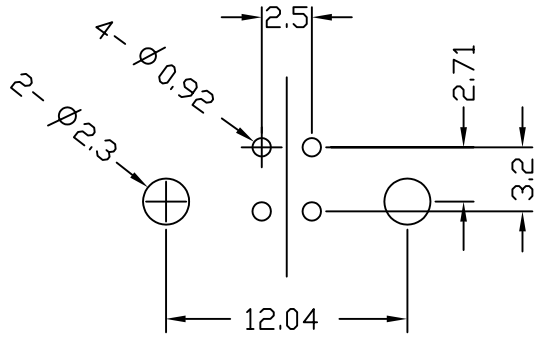

PCB LAYOUT (PCB THICKNESS:1.60/1.20MM)
OTHER TOLERANCE: ±0.05

NOTES:

1. ELECTRICAL CHARACTERISTICS
   - CONTACT CURRENT RATING:1.5AMPERES.
   - DIELECTRIC WITHSTANDING VOLTAGE: AC 500V AT SEA LEVEL.
   - INSULATION RESISTANCE:1000MEGOHMS MINIMUM.
   - CONTACT RESISTANCE:30MILLIOHMS MINIMUM.
   - OPERATING TEMPERATURE:-55°C TO +85°C
2. MECHANICAL CHARCTERISTICS
   - MATING FORCE:3.5KG.MAXIMUM.
   - UNMATING FORCE:1KG.MINIMUM.
3. MATERIAL
   - SHELL: COPPER ALLOY, PLATING WITH NICKEL.
   - REAL SHELL: SPCC, PLATING WITH NICKEL.
   - HOUSING: PBT, WHITE.
   - CONTACT: COPPER ALLOY, PLATING WITH 30u" GOLD.
4. UNSPECIFIED TOLERANCE: ,XX ±0.25
   ,X ±0.30

XUSB-6-5-4-3-6-3-02

- 6 : USB
- 5 : B/T VERTICAL
- PIN No.
- SHELL PLATING: 3 : ALL Ni PLATING
- PIN PLATING: 6 : Au 30u"
- PLASTIC HOUSING COLOR: 3 : WHITE
- SERIAL NUMBER

RoHS Compliant

XMULTIPLE — CONNECTING THE INFORMATION AGE

XMULTIPLE ASIA 4F, No. 347,Yang Guang St., Neihu Chiu , Taipei , Taiwan 11475	XMULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065
THIS DRAWING IS A CONTROLLED DOCUMENT.	
TITLE: USB B TYPE (F) VERTICAL DIP	
PART NO: XUSB-6-5-4-3-6-3-02	

UNIT	SHEET	REV
mm	1 of 1	01

G/NO:	
DWG NO:	XUSB-6-5-4-3-6-3-02
DRAWN:	TARA
CHKD:	JEFF
DATE:	Aug.28,06