

SECTION A-A

ELECTRICAL CHARACTERISTICS

Contact Current Rating: 1.5 Amperes.
 Dielectric Withstanding Voltage: AC 500V at sea level.
 Insulation Resistance: 1000 Megohms Min.
 Contact Resistance: 30 Milliohms Max.
 Operating Temperature: -55°C to +85°C


MECHANICAL CHARACTERISTICS

Mating Force: 3.5 Kg. Maximum.
 Unmating Force: 1 Kg. Minimum.

MATERIAL

Contacts: Copper Alloy, Gold Flash
 Insulator: PBT UL94V-0 Rate, White.
 Shell: Copper Alloy, Nickel
 UNSPECIFIED TOLERANCE: .XXX ±0.150
 .XX ±0.25
 .X ±0.30

Part Numbering

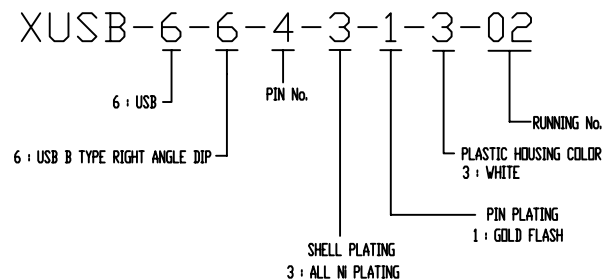

RoHS Compliant

X MULTIPLE		CONNECTING THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu Chu, Taipei, Taiwan 11475		XMULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065	
THIS DRAWING IS A CONTROLLED DOCUMENT.		G/ND:	
TITLE: USB-B Female 90D DIP		DWG NO: XUSB-6-6-4-3-1-3-02	
PART NO: XUSB-6-6-4-3-1-3-02		DRAWN: RUNES	
		CHKD: JEFF	
		UNIT mm [inch]	SHEET 1 of 1
		REV 01	DATE: Jun.21,06