


NOTES:

1. MATERIAL:
HOUSING—PBT+30%GF,BLACK
CONTACTS—C5191R—EH,GOLD FLASH
SHIELD—C2680R—H,NI 80U”MIN
2. MECHANICAL:
MATING: 35N MAX.
WITHDRAWAL: 10N MIN.
DURABILITY: 1500 CYCLES MIN.
3. ELECTRICAL:
CURRENT: 1.5A MAX
VOLTAGE: 30V MAX
WITHSTANDING VOLTAGE: 500V AC
CONTACT RESISTANCE: 30 m Ω MAX
INSULATION RESISTANCE: 1000M Ω MIN
4. ENVIRONMENTAL
TEMPERATURE RANGE -55° C ~ +85° C
5. UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]

**SUGGESTED PCB LAYOUT
(TOP VIEW)**

DIMENSIONAL TOLERANCE: .XX ±0.08[0.003]

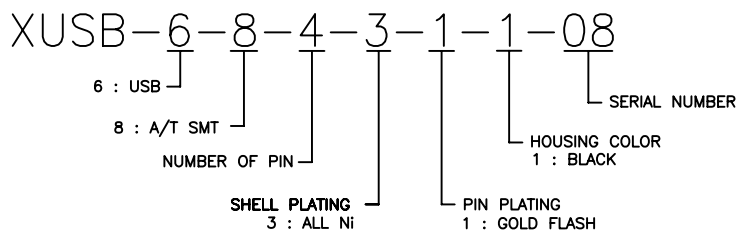

RoHS Compliant

		CONNECTING THE INFORMATION AGE		
				XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu Chiu, Taipei, Taiwan 11475
THIS DRAWING IS A CONTROLLED DOCUMENT.				DWG NO: XUSB-6-8-4-3-1-1-08
TITLE: MINI-USB A MALE SMD BREAK				DRAWN: AUSTIN
PART NO: XUSB-6-8-4-3-1-1-08				CHKD: JEFF
		UNIT mm[inch]	SHEET 1 of 1	REV 01
				DATE: Jan.03,07