
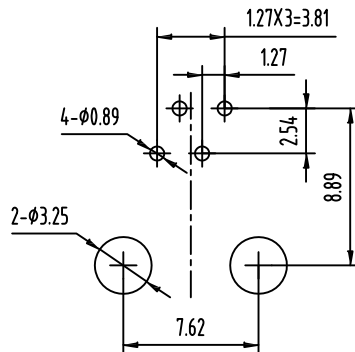


PCB LAYOUT



REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
△		原始版本	MARRY 06.06.09	
△		增加料号,更改图号	JACKY 07.02.05	
△		增加颜色信息	ZHOUXIONG 07.04.28	

NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING : 125VAC RMS
- 2. CURRENT RATING : 1.5 AMP
- 3. CONTACT RESISTANCE : 50 MILLIOHMS MAX
- 4. INSULATION RESISTANCE : 500 MEGOHMS MIN @500 VDC
- 5. DIELECTRIC STRENGTH : 1000 VAC RMS 50HZ.1MIN

MECHANICAL:

- 1. HOUSING MATERIAL : GLASS FILLED POLTER(UL94V-0)
- 2. CONTACT MATERIAL : PHOSPHOR BRONZE T=0.46MM
- 3. PLATING : GOLD PLATION OVER NICKEL
- 4. OPERATION LIFE : 750 CYCLES MIN
- 5. PCB RETENTION PRE-SOLDER : 1 LBMIN
- 6. PCB RETENTION POST-SOLDER:10 LBMIN

ENVIRONMENTAL:

- 1. STORAGE : -40°C TO +85°C
- 2. OPERATION : 0°C TO +70°C
- 3. WAVE SOLDER TEMPERATURE:230~250°C(5~10SECONDS)

MATES WITH MODULAR PLUG CONFORMING TO FCC PART68 SUBPART F

PART NUMBER:

XA52A-XX-XXXXXX

52A SERIES
PCB JACK
(52A系列PCB接口)

POSITIONS (位位数):
4-4POSITIONS (4P) .6-6POSITIONS (6P)
8-8POSITIONS (8P) .0-10POSITIONS (10P)

CONTACTS (接触数):
2-2CONTACTS (2C)
4-4CONTACTS (4C) .6-6CONTACTS (6C)
8-8CONTACTS (8C) .0-10CONTACTS (10C)

PORTS (接口):
1-1X1 (一) .2-1X2 (二)
4-1X4 (四) .5-1X5 (五)
6-1X6 (六) .8-1X8 (八)

SHIELD (屏蔽):
0-W/O SHIELD (不屏蔽)
1-HALF SHIELD (半屏蔽)
2-SHIELD W/EMI (屏蔽)
3-SHIELD W/O EMI (不屏蔽)

GOLD PLATING (镀金厚):
1-FU". 2-3U"
3-6U". 4-15U"
5-30U". 6-50U"

PLASTIC (塑料):
1-PBT.2-NYLON66 (尼龙66)
3-NYLON46 (尼龙46) .4-ABS

PIN STYLE (引脚):
1-ROUND PIN(圆脚)
2-FLAT PIN(扁脚)

PEG/TAB (定位块):
0-W/O PEG(无块)
1-FRONT PEG3.05(前脚3.05)

2-FRONT PEG3.68(前脚3.68)
3-FRONT PEG4.57(前脚4.57)

4-BACK PEG3.05(后脚3.05)
5-BACK PEG3.68(后脚3.68)

MM (INCH)		设计 MARRY 日期 06.06.09		XMULTIPLE	
— 公差 —		审核 JACKY 日期 06.06.09		系列	名称 无耳类
MM	±	批准 ZHOUXIONG 日期 06.06.09		52A	XA52A-44-100111
.0 ± 0.20	±	材料:		图号 Z/A XA52A100111	
.00 ± 0.15	±	数量:		A4 版本	
.000 ± 0.075	±	表面处理:		料号: 请查看注释	
角度 ± 0.01°		比例: 1:1		不按比例	
第三视图				共 1 页 第 1 页	