

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

Insertion Loss: 1-100MHZ -1.0dB MAX

Return Loss: 1-30MHZ -18.0dB MIN

30-45MHZ -16.0dB MIN

45-60MHZ -14.0dB MIN

60-80MHZ -12.0dB MIN^{Chip Side}


Crosstalk: 1-100MHZ -35.0dB MIN

CMR: 1-100MHZ -35.0dB MIN

Hipot:1500V AC 6S 1mA

OCL:350uH MIN @ 100KHZ 100mV 8mA DC

Schematics

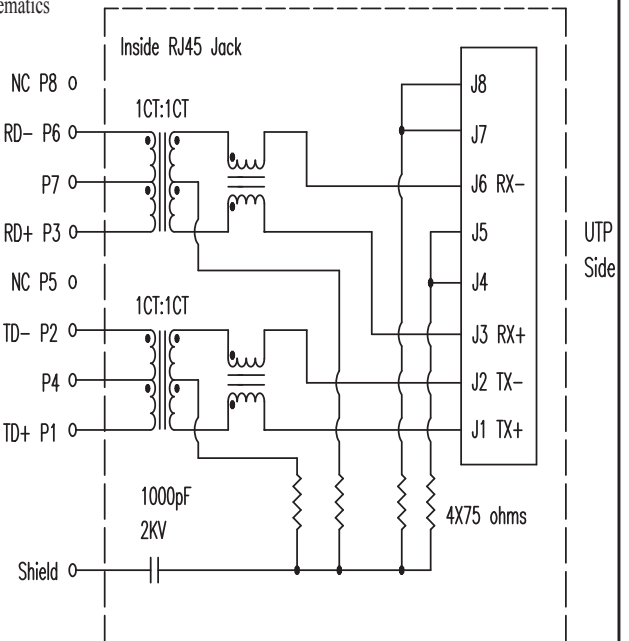

X MULTIPLE

Drafted by: Hero

Unless otherwise specified:
Tolerances: Fractions: ±1/64
Angles: ±1° Decimals: ±.005[.13]

10/100BASE, Tab-Down RJ45
Single port, shielded with
one LED

Approved By: Jacky

Part No:
XARJ-0019ANL

REV.
A

SHEET 1 OF 1