



RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2012/09/17	

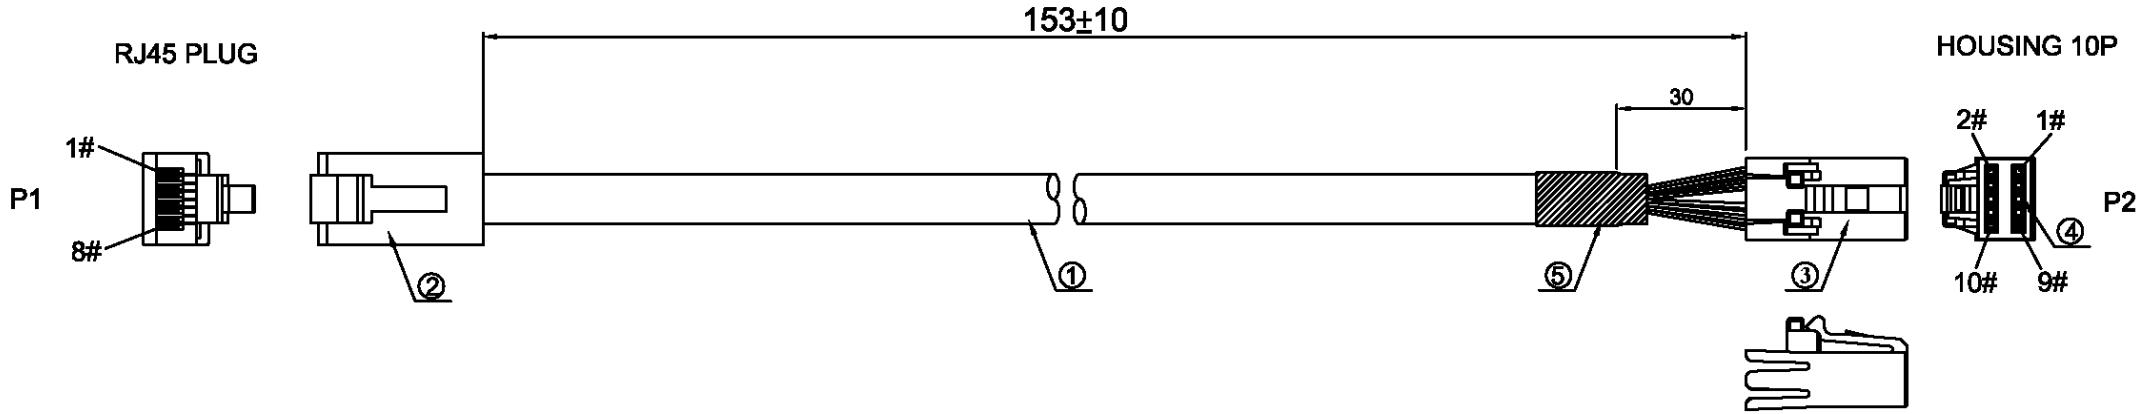

PIN ASSIGNMENT

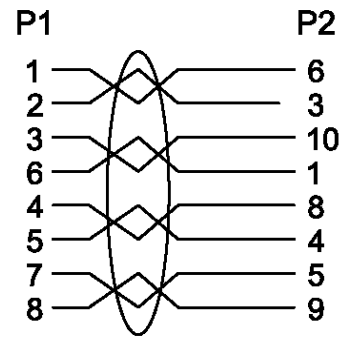

NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100% OPEN, SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE: 20 Mohm MIN. DC 300V 0.01sec.
 - CONTACT RESISTANCE: 1 ohm MAX.

ITEM	QTY	PART NUMBER	DESCRIPTION
5	1		BLACK SHRINK TUBE.
4	10		PITCH 1.27 TERMINAL.(1-487547-1)
3	1		PITCH 1.27 10P HOUSING.(1-487937-0)
2	1	A0512	RJ45 8P8C PLUG, WITH SHELL, PIN GOLD PLATED 30U".
1	1	E0618	CAT.5e STP 24AWG*4P BLACK OD:6.0MM

UNIT	mm	Projection		Xmultiple Technologies, Inc.			
DRAWN	<i>Huang chenggen</i>	SCALE	FREE	TITLE			
CHECK, BY		REV	A	RJ45 M/HOUSING 10P			
APP, BY		DATE	2012/09/17	TOLERANCES			
DWG NO.	SE-S-0050			X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.	XCAB-SRH10F			SHEET	1/1	SIZE	A4