


SUGGESTED PCB LAYOUT
(TOP VIEW)

NOTES:

- ELECTRICAL:
 CONTACT CURRENT RATING: 3 AMPERES.
 DIELECTRIC WITHSTANDING VOLTAGE: AC 500V AT SEA LEVEL.
 INSULATION RESISTANCE: 1000 MEGOHMS MIN.
 CONTACT RESISTANCE: 30 MILLIOHMS MAX.
 OPERATION TEMPERATURE : -55°C TO +105°C.
- MATERIALS:
 CONTACT : COPPER ALLOY. PLATED WITH GOLD FLASH.
 INSULATOR : PBT.
 SHELL : SPCC. PLATED WITH NICKEL.
 SCREW : COPPER ALLOY.
 BOACK : COPPER ALLOY.
- UNSPECIFIED TOLERANCE: .XXX ±0.15 [0.006]
 .XX ±0.25 [0.010]
 .X ±0.30 [0.012]

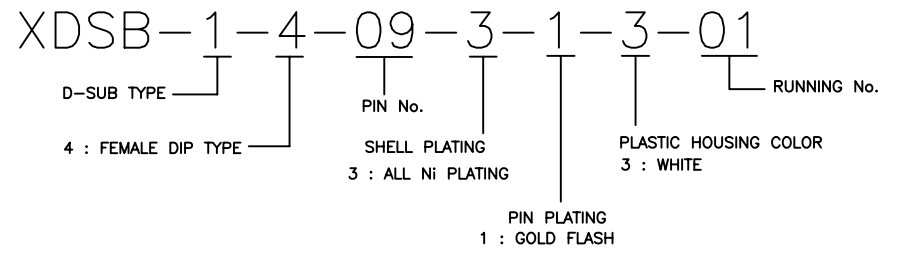

XMULTIPLE			CONNECTING THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu Chiu, Taipei, Taiwan 11475		XMULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065		G/NO:
THIS DRAWING IS A CONTROLLED DOCUMENT.				DWG NO: XDSB-1-4-09-3-1-3-01
TITLE: D-SUB 09PIN FEMALE DIP TYPE				DRAWN: AUSTIN
PART NO: XDSB-1-4-09-3-1-3-01				CHKD: JEFF
		UNIT mm[inch]	SHEET 1 of 1	REV 01
				DATE: Oct.17,06