
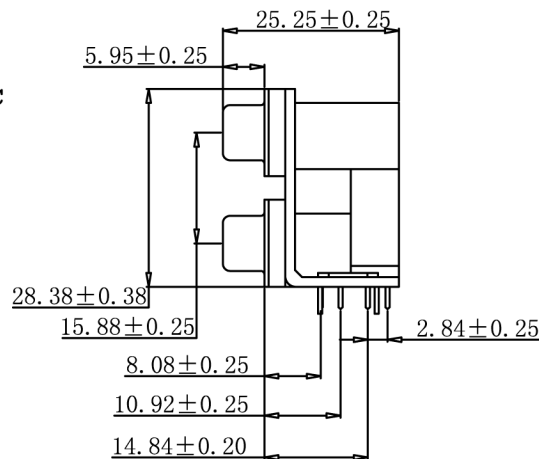


8	7	6	5	4	3	2	1
版次	日期	变更内容	签名				
A/0	08.08.13	新制定					


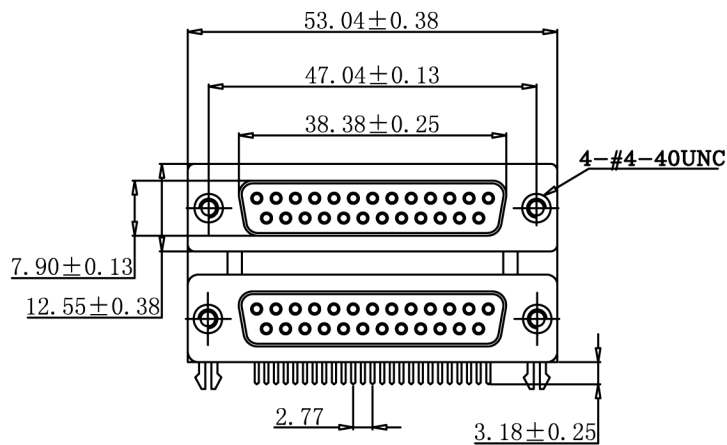


MATERIALS AND FINISH

SHELL : STEEL MATERIAL, NICKEL FINISHED
 INSULATOR : PBT THERMOPLASTIC, 30% GLASS
 FILLED, UL 94V-0 RATED, BLACK COLOR
 CONTACT MATERIAL : BRASS
 CONTACT FINISH : SELECTIVE GOLD FLASH
 GROUNDING BRACKET : ZINC ALLOY, ZINC PLATED

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 1.0 AMPS
 CONTACT RESISTANCE : 30 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE : 500 V AC MIN.
 INSULATION RESISTANCE : 1000 MEGAOHMS MIN.
 TEMPERATURE RATING : -55°C ~ +105°C

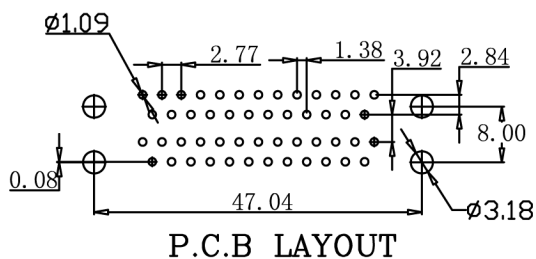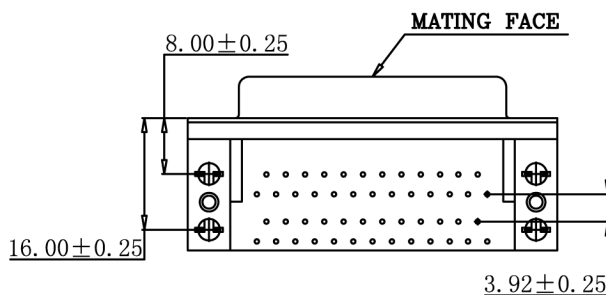

Tolerance	Drawn by	FAN SHA
Dimensions	Designed by	FAN SHA
X. ±0.38	Approved by	ZHEN CHUN
X.X ±0.35	DWG NO. CP-024	Scale 1:1
X.XX ±0.25	Sheet 1 of 1	Unit mm
X.XXX ±0.15	REV A0	
Angle		
X. ° ±2°		
X.X° ±1.0°		
X.XX° ±0.5°		

Xmultiple

Title:
Dual port D-SUB connector

Part No: XDSB-1200-150-001-100