
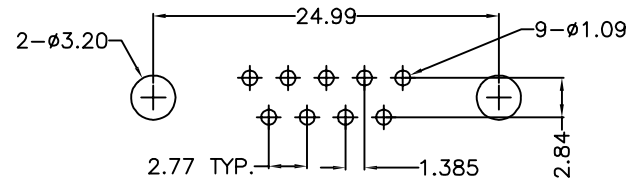


REV.	ECN.NO.	NAME	DATE
A	NEW	BOB	2011/02/19

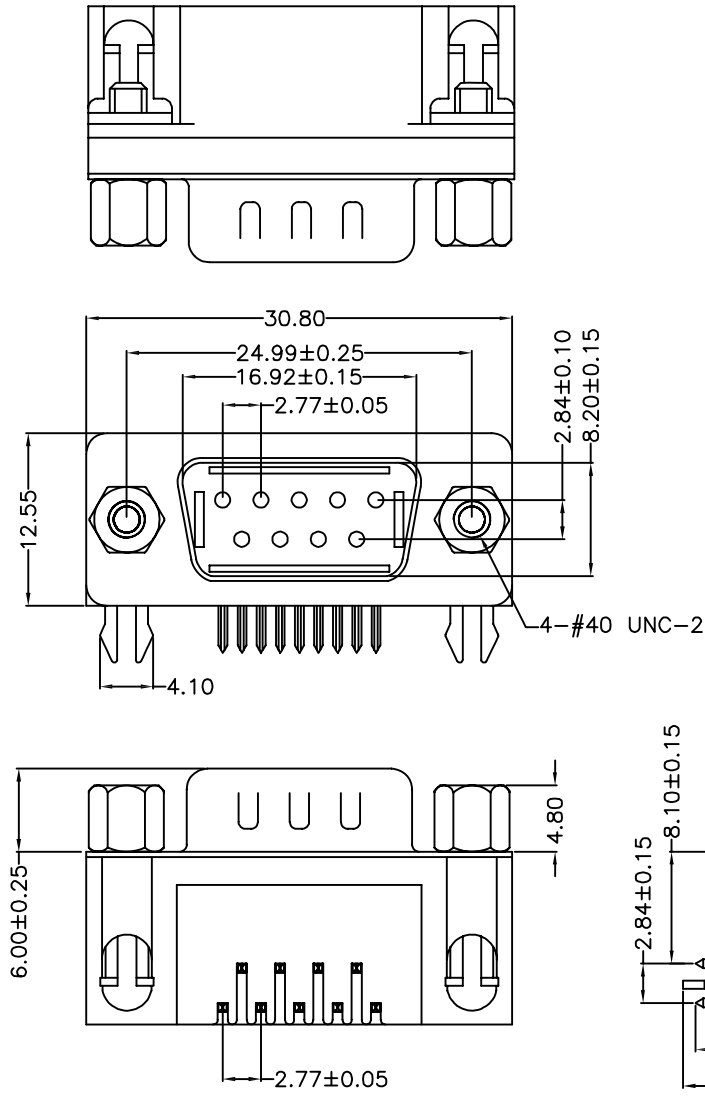

P.C.B. LAYOUT

NOTES:

1.MATERIAL

- 1.1 Insulator:PBT+30%Glass Fiber (UL94V-0)
- 1.2 Contact:Brass
- 1.3 Contact Plated:Gold/TIN PLATED
- 1.4 Shell:Steel,Nickel Plated
- 1.5 Screw:Brass, Nickel Plated

2.SPECIFICATION

- 2.1 Current Rate:5 Amps
- 2.2 Insulator Resistance:1000MΩ Min. at 500V DC
- 2.3 Dielectric Strength:500V Per minute
- 2.4 Operation Temperature:-55°C to+105°C

PART NO.	PLATING	COLOR
A02+0912-2080	GOLD/TIN PLATED	BLACK
A02+0912-2580	GOLD/TIN PLATED	GREEN
A02+0912-1080	GOLD PLATED	BLACK

TOLERANCE UNSPECIFIED		X MULTIPLE		CONNECTING THE INFORMATION AGE	
.0	± 0.50				
.00	± 0.38	TITLE: D-sub connector			
.000	± 0.25	SIZE: A4	UNIT: mm	PART NO: YZD-A02+0912-2080	
ANGLE	± 3.°	SCALE: 1:1		PROJECTION	REV: A
MANUFACTURING COPY		DWG . PATH		C/YZD-A02+0912-2080	
DRAWN BY:	BOB			SHEET: 1 OF 1	
CHECKED BY:	BOB				
APPROVED BY:	IPIS				