

XF-T1/CEPT/ISDN-PRI TRANSFORMERS

P/N: XF-TCB3W4ABD

Page :

1/2

Feature


- Dual SMT package contains both transmit and receive Transformers.
- Models matched to leading transceiver ICs.
- RoHS compliant.



Electrical Specifications @ 25°C						
Part Number	Turns Ratio (±5%)		OCL (mH Min)	Leakage Inductance (µH Max)	C _{ww} (pF Max)	HI-POT (Vac)
	Transmit (1-2,8-9,11-12,18-19)	Receive (24-25,27-28,34-35,37-38)				
XF-TCB3W4ABD	1 : 2.4	1 : 1	1.0	0.50	35	1500

* Operating temperature range: 0°C to +70°C. Storage temperature range: -25°C to +125°C

Schematic

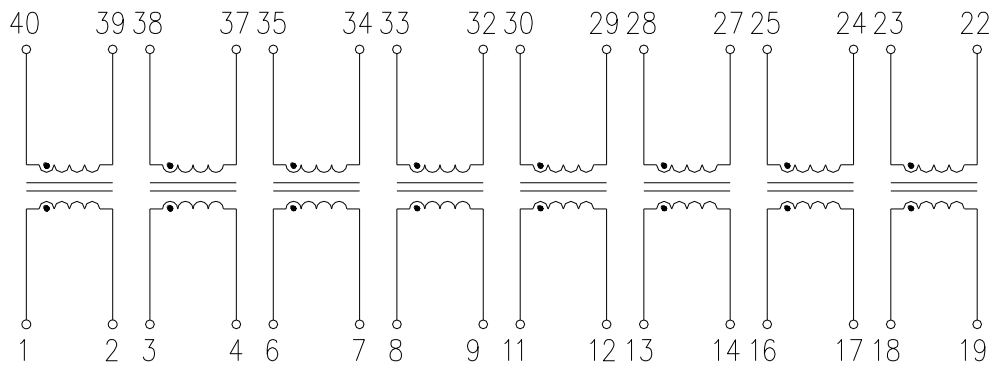

Tel:+805-579-1100	Fax:+805-579-7800
E-mail:info@xmultiple.com	Website:www.xmultiple.com


XF-T1/CEPT/ISDN-PRI TRANSFORMERS

P/N: XF-TCB3W4ABD

2/2

Page :

Mechanical

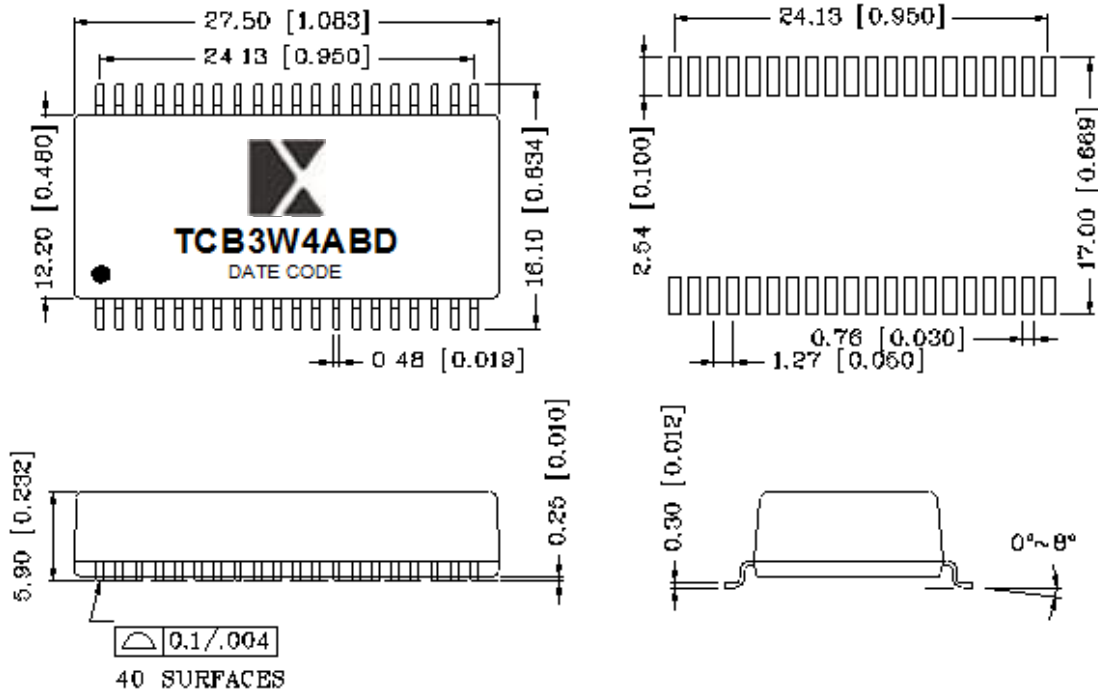

Units: mm[Inches].

Tolerance: ±0.25(0.010) unless specified otherwise.

Datasheet Change History:

V0	Datasheet Set Up