






REV.	SPECIFICATION	ECN NO.	APPD.
R4			







Detail A  
Without cover

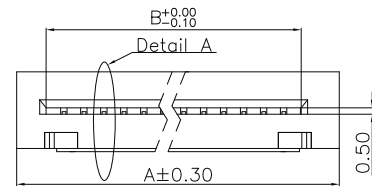


**Material:**  
Housing: Thermoplastic Polyester Glass Filled UL94V-0.  
Contacts: Copper Alloy.

**Electrical Characteristics:**  
Current Rating: 1 AMP.  
Dielectric Withstanding Voltage: AC 500V For 1 minute.  
Insulator Resistance: 1000MΩ min. at DC 500V.  
Contact Resistance: 20mΩ max. at DC 100mA.  
Operating Temperature: -55°C~+105°C.

**\*RoHS Compliant**

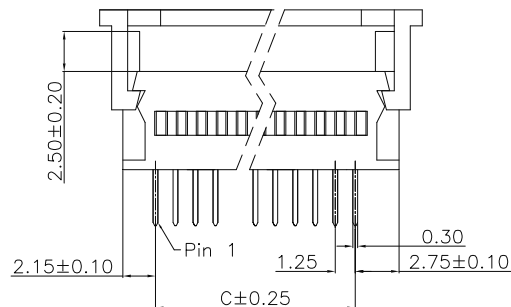


Note:  
D: Even Pin Number .  
C: Odd Pin Number .




P.C. Board Layout  
(Top View)

2533-xxTR



FFC/FPC Dimension  
Thickness 0.30±0.05mm

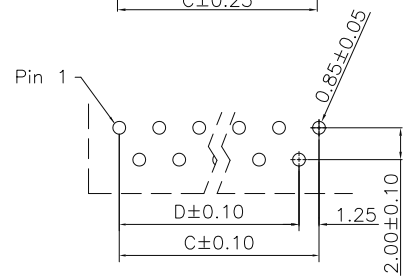

P.C. Board Layout  
(Top View)

2533-xxTS

Series **2533- xx T x U**  
No. of Pin Count  
T: Tin Plated  
U: Tube Package  
S: Top Entry(Straight)  
R: Side Entry(Right Angle)

Position Dimension	3 Thru 40
A	No. of Positions X 1.25+5.7
B	No. of Positions X 1.25+1.47
C	No. of Positions X 1.25-1.25
D	No. of Positions X 1.25-1.25

Tolerances	Drawn No.	2533D02001
x = ±0.5	Projection	
.x = ±0.25	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	wwc 04/20'10

Title:  
2533 Series  
FFC/FPC Connector  
1.25mm(0.049") ZIF Type

<b>Xmultiple</b>			
P/N: XFL-2533-xxTxU			
SHEET	1/1	Ver.No.	R4