

DUAL PORT SMD RJ11 CONNECTOR

P/N: XMS-S20406Z00

Page : 1/2

Feature


- Dual port SMD RJ11 Connector.
- RoHS Compliant.

Electrical Specification			
Part Number	Durability cycles (Min)	Insulation Resistance (Ω)	Dielectric Withstanding Voltage @60Hz (Vac Min)
XMS-S20406Z00	600	1000	1000

RJ45 Material Specification				
Part Number	Contact		Housing	
	Material	Plating Area	Material	Specification
XMS-S20406Z00	Phosphor bronze	10-20m inches Nickel over selective gold plating 3μ inches	High Temp Thermoplastic	UL 94V-0

* Operating temperature range: 0° to $+70^{\circ}$. Storage temperature range: -25° to $+125^{\circ}$.

Mechanical

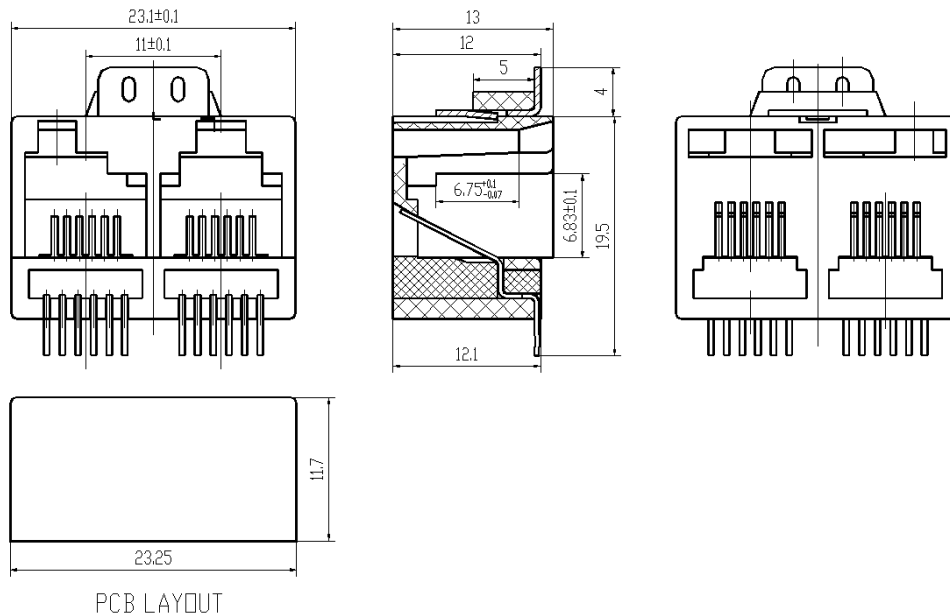

Tel: 805-579-1100	Fax: 805-579-7800
E-mail:Info@xmultiple.com	Website:www.xmultiple.com



DUAL PORT SMD RJ11 CONNECTOR

P/N: XMS-S20406Z00

Page : 2/2

Units: mm.

Tolerance: ± 0.25 unless specified otherwise.

NOTE:

Datasheet Change History:

V0	Datasheet Set Up

Tel: 805-579-1100	Fax: 805-579-7800
E-mail:Info@xmultiple.com	Website:www.xmultiple.com