



RoHS Compliance

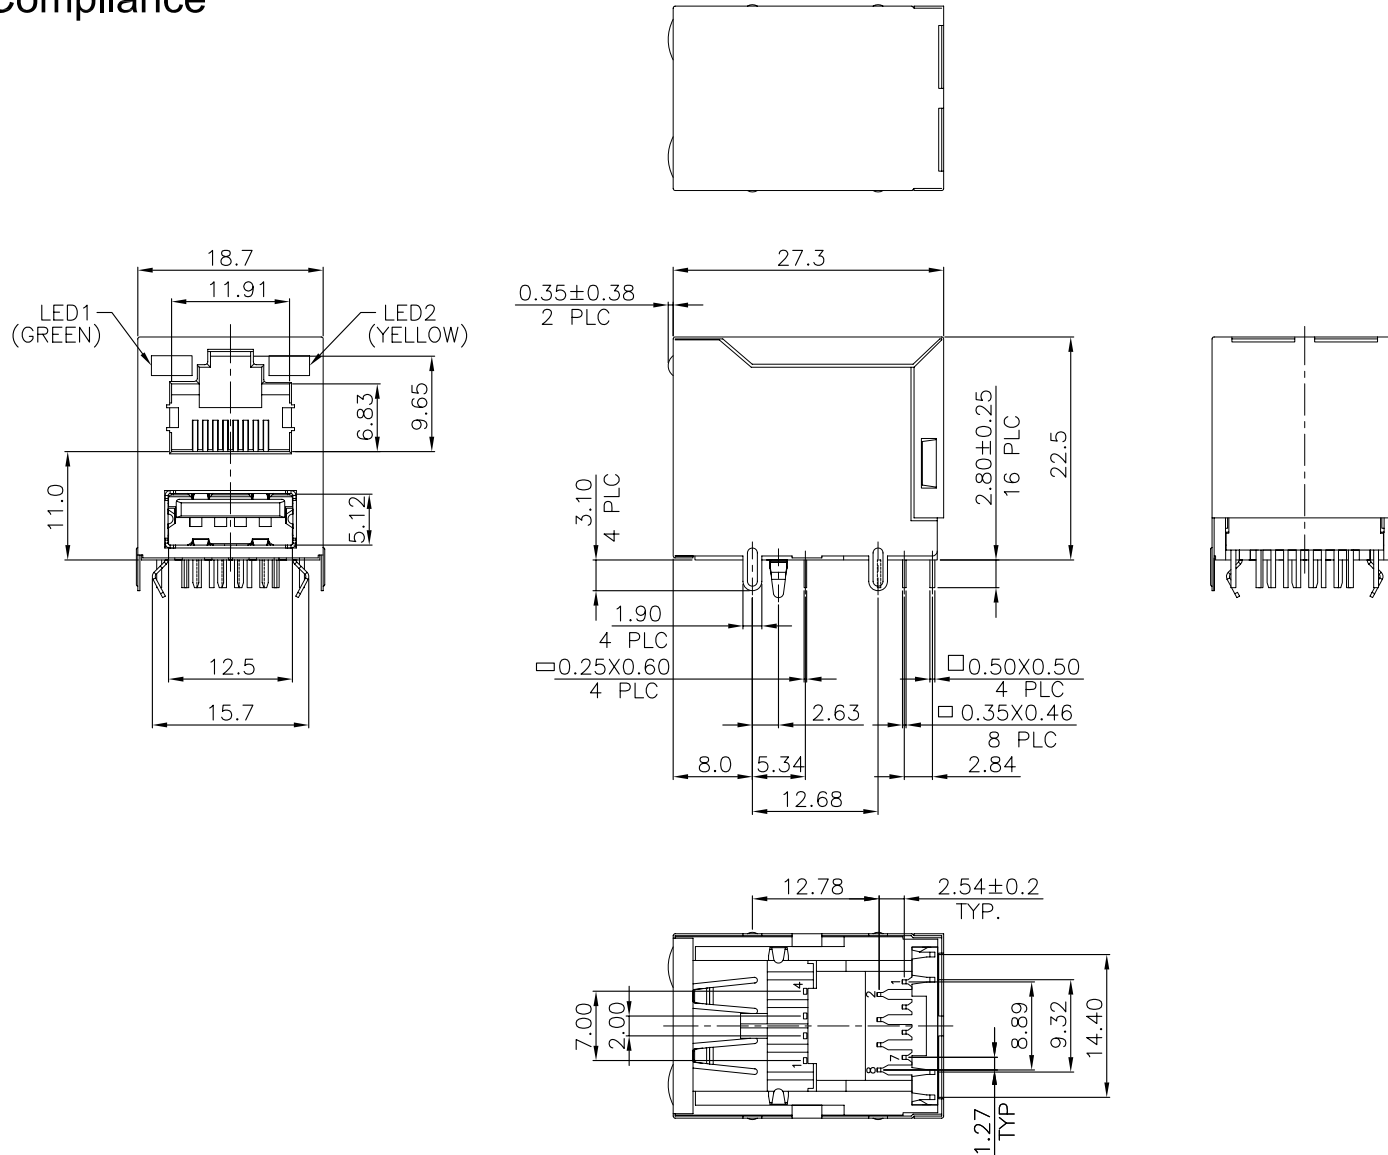

MATERIAL:

- HOUSING & COVER—PBT POLYESTER UL94V-0 MIXED GLASS FIBER. STANDARD COLOR—GRAY OR BLACK.
 - CONTACTS—0.35mm THICK PHOS-BRONZE PLATED WITH 6u" HARD GOLD AND GOLD FLASH IN SOLDER AREA.
 - SHIELD—0.20mm THICK COPPER ALLOY, PLATED WITH NICKEL.
 - USB:
 - HOUSING—PBT POLYESTER UL94V-0 MIXED GLASS FIBER. STANDARD COLOR—GRAY.
 - CONTACTS—0.25mm THICK PHOS-BRONZE PLATED WITH GOLD FLASH AND TIN PLATED IN SOLDER AREA.
 - SHIELD—0.30mm THICK SPCC, 80u" MIN. NICKEL PLATED.
- CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68,SUBPART F.

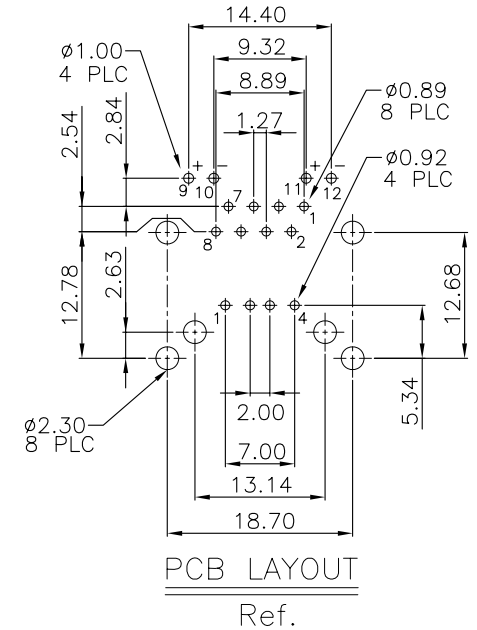

DO NOT SCALE DRAWING	TOLERANCES UNLESS OTHERWISE NOTED	INCH	MM	DR. CIAN.CI.LUO	DATE MAY-26 '09
THIRD ANGLE PROJECTION	LINEAR	MM INCH	00 ± 000 ± 0000 ±	CK'D M.CHANG	MAY-26 '09
MM INCH	ANGLE ± 0° 30'	RADII	+ 0.40 - 0.15	APP'D W.J.YANG	MAY-27 '09

<i>XMULTIPLE</i>	
TITLE	MODULAR JACK, RJ45 STACKED OVER USB CONN, WITHOUT LED, DIP TYPE
SCALE	SIZE DWG.NO. XMB-9711-8814-SOL1-W-A