
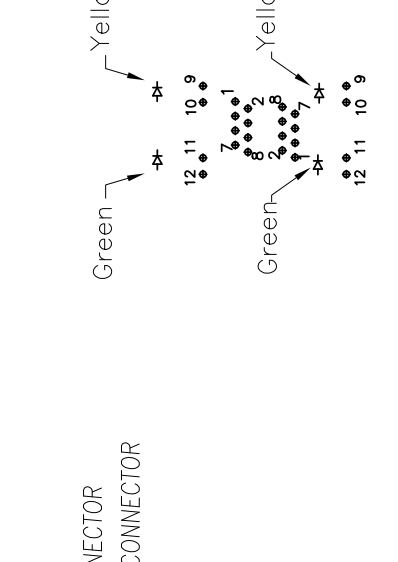
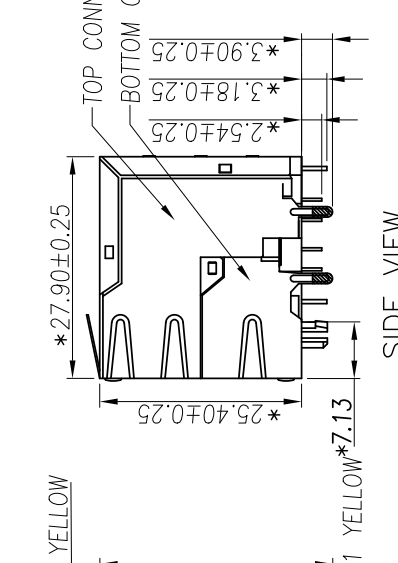
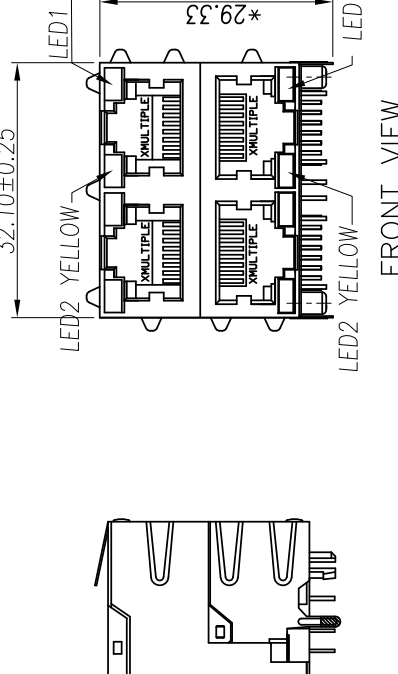
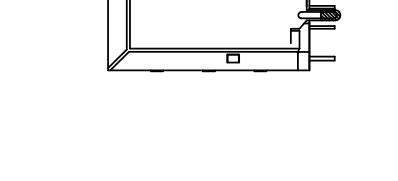


1	2	3	4	5	6	7	8
REV. A		ECN.NO. NEW		NAME KEN		DATE 2010/05/11	
							
 <p>FRONT VIEW</p>		 <p>SIDE VIEW</p>		 <p>LED SCHEMATIC</p>		 <p>PCB LAYOUT</p>	
<p>PART NO: XMD-S-22-8-8-6-F2-DN-2-0-P</p> <p>S-SHIELDED 22-2*2PORT 8P8C</p> <p>6-Y/Y LED</p> <p>F2-Round Pillar</p> <p>4P-Housing PBT</p> <p>10-contact pin length 2.54mm</p> <p>2-gold plated 3u"</p> <p>DN-3-side fingers</p>							
<p>NOTES:</p> <p>1.MATERIAL: HOUSING:HIGH TEMP.THERMOPLASTIC,BLACK,PBT/NY6T(PA6T)UL 94V-0 CONTACT:PHOSPHOR BORNEZE,T=0.35MM. SHELL:BRASS,T=0.25MM.</p> <p>2.FINISH: CONTACT:50u"MIN. NICKEL UNDERPLATING ALL AREA, 100u"MIN. TIN ON SOLDERTAILS, 3u"MIN. GOLD PLATING ON CONTACT AREA. SHELL:30u"MIN. NICKEL UNDERPLATING ALL AREA SHELL: T=0.25mm COPPER ZINC ALLOY PLATED WITH NICKEL 3.OPERATING TEMPERATURE:-40°C~+85°C. 4.JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F 5.加"*"为重要管控尺寸</p>							
<p>TOLERANCE UNSPECIFIED ±0.5</p> <p>.0 ±0.38</p> <p>.00 ±0.25</p> <p>.000 ±0.10</p> <p>ANGLE ±3°</p> <p>MANUFACTURING COPY</p>							
DRAWN BY: STEVEN		CHECKED BY:		APPROVED BY:		<p>SIZE: A4</p> <p>UNIT: mm</p> <p>SCALE: 1:1</p> <p>DWG . PATH</p>	
TITLE: RJ45 Connectors, w/LED, 8P, 8C, Shielded/Thru Hole		PART NO: XMD-S-22-8-8-6-F2-DN-2-0-P		PROJECTION		REV: B	
SUGGESTED PCB LAYOUT TOLERANCE XX±0.05[0.002]		PCB LAYOUT		CONNECTING THE INFORMATION AGE		SHEET: 1 OF 1	
1	2	3	4	5	6	7	8