


2*4 RJ45 CONNECTOR MODULE AND LEDS

XRJD-S-24-8-8-M

Page : 1/2

- 2*4 RJ45 connector module.
- Suitable for CAT 5 & 6 Fast Ethernet Cable or better UTP.
- RoHS compliant.
- Recommended panel

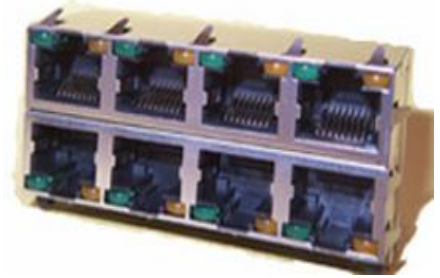

Part Number	9,10 (Left Led)	11,12 (Right Led)
M	Red	Yellow

RJ45 Durability Testing Rating & Material Specification


Part Number	Durability	Mating Force	Shield	
			Material	Finish
XRJD-S-24-8-8-M	750 Insertions	5 lbs./2.268 kgs.	Brass	10-20m inches Nickel over

RJ45 Material Specification

Part Number	Contact		Housing	
	Material	Plating Area	Material	Specification
XRJD-S-24-8-8-M	Phosphor Brass	10-20m inches Nickel over selective gold plating 15μ inches	Thermoplastic	UL 94 V-0

* Operating temperature range: -40°C to +85°C. Storage temperature range: -40°C to +125°C.

MECHANICAL

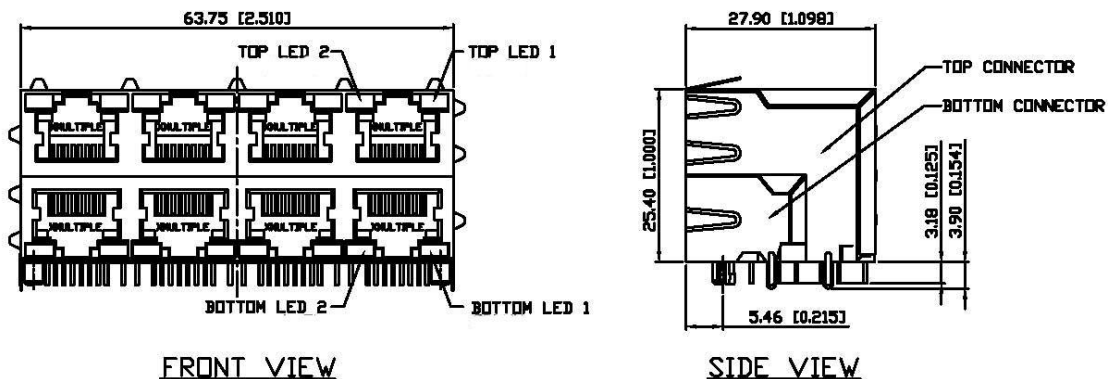


Units: mm. and Tolerance: ±0.25 unless specified otherwise.

2*4 RJ45 CONNECTOR MODULE AND LEDS

XRJD-S-24-8-8-M

Page : 2/2

PCB LAYOUT

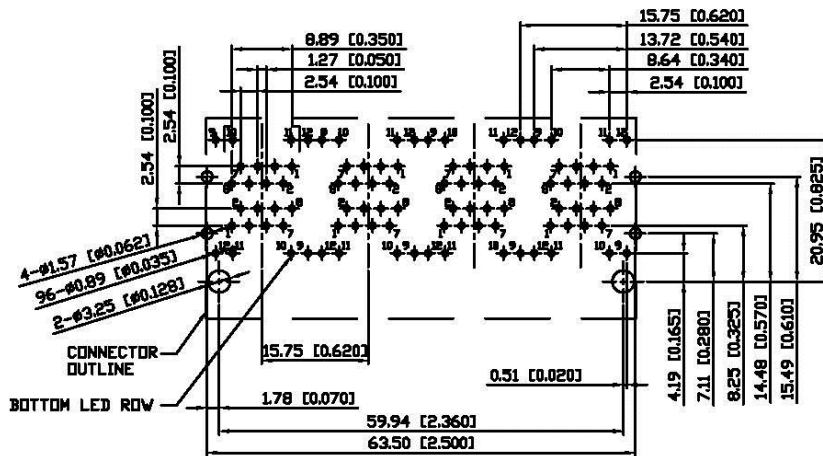

PANEL CUTOUT:

