

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

Insertion Loss: 1-100MHZ -1.0dB MAX

Return Loss: 1-30MHZ -16.0dB MIN

30-60MHZ -14.0dB MIN

60-80MHZ -10.0dB MIN

Crosstalk: 1-30MHZ -40.0dB MIN


30-60MHZ -35.0dB MIN

60-100MHZ -30.0dB MIN

CMRR: 1-100MHZ -35.0dB MIN

Hipot:1500V AC 6S 1mA

OCL:350uH MIN @ 100KHZ 100mV 8mA DC

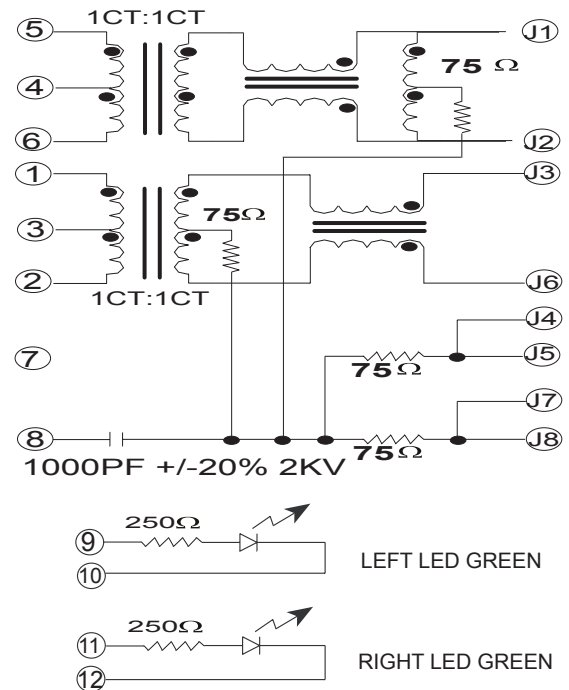

XMULTIPLE

UNIT:mm
.xx +/-0.25, .xxx +/-0.13

Approved By:

**10/100BASE
1X1 Tab-Down RJ45**

Part No:TRJ-1229ANL

REV.
A

Drafted by:HQLIU

SHEET 1 OF 1