

Viewed from PCB Component side

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

Insertion Loss: 1-100MHZ -1.0dB MAX

Return Loss: 1-30MHZ -16.0dB MIN

30-60MHZ -14.0dB MIN

60-80MHZ -10.0dB MIN

Crosstalk: 1-30MHZ -40.0dB MIN

30-60MHZ -35.0dB MIN

60-100MHZ -30.0dB MIN



CMRR: 1-100MHZ -35.0dB MIN

Hipot:1500V AC 6S 1mA

OCL:350uH MIN @ 100KHZ 100mV 8mA DC

DCR:J1-J4=J2-J5=J3-J7=

J6-J8=J2-J3=135-165ohms

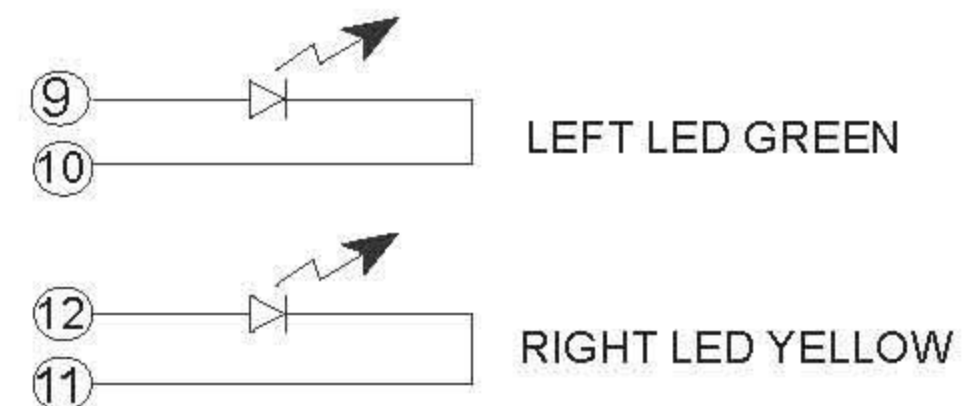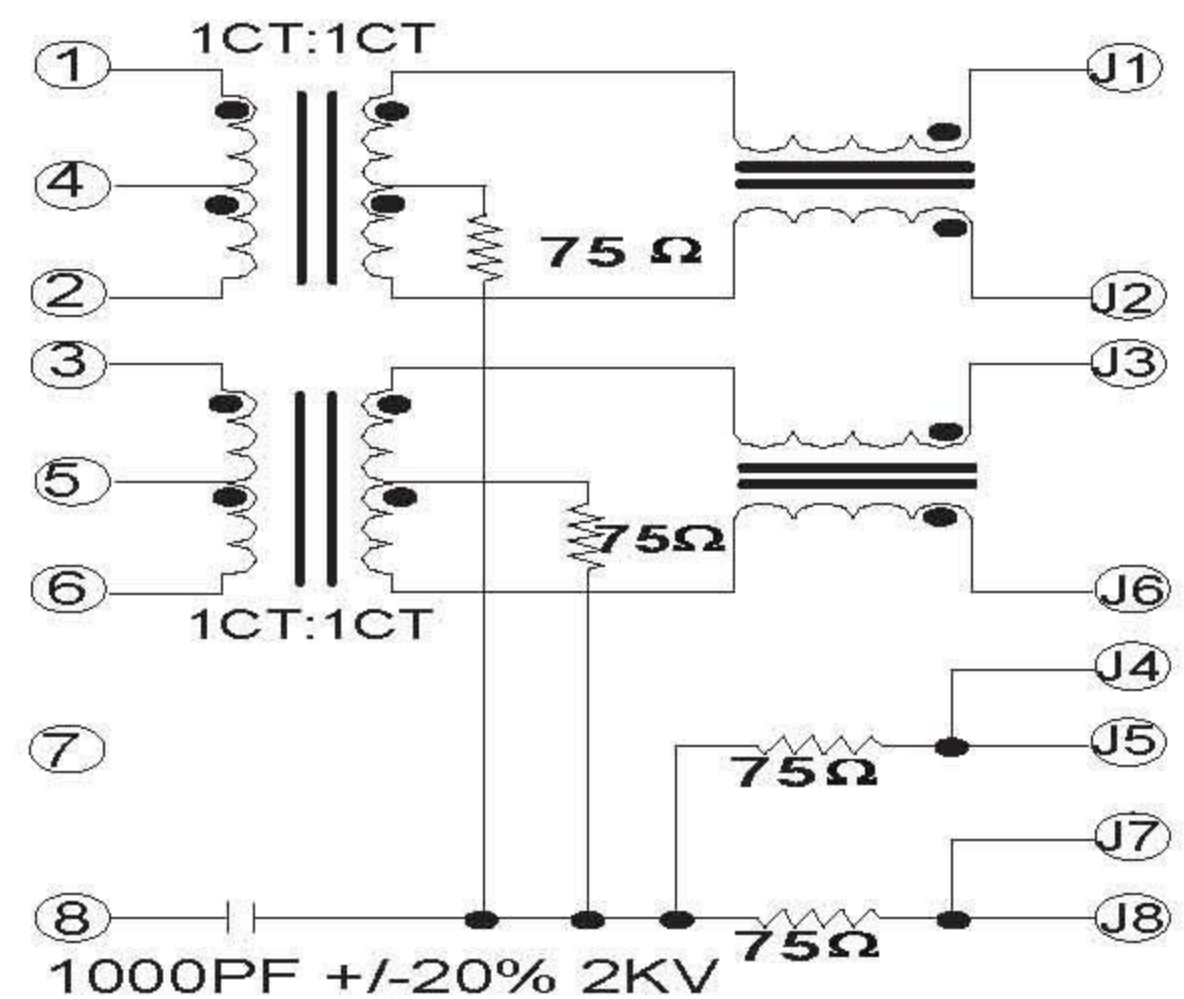

XMULTIPLE

UNIT:mm
.xx +/-0.25, .xxx +/-0.13

Approved By: **Jacky**

**10/100BASE
1X1 Tab-Down RJ45**

Part No:
XMG-XARJ-1046ANL

REV.
A

Drafted by: HERO

SHEET 1 OF 1