




MATERIALS:

- HOUSING-DSM STANYL TE250F6 (NYLON-46)
HEAT DEFLECTION TEMP.290°
BLACK COLOR,UL94V-0
- CONTACTS-0.35mm THICK PHOS-BRONZE PLATED
WITH 50u" HARD GOLD AND GOLD FLASH ON
SOLDER AREA.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

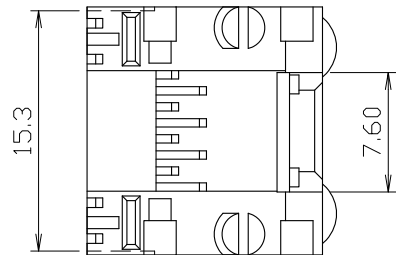

DETAIL X

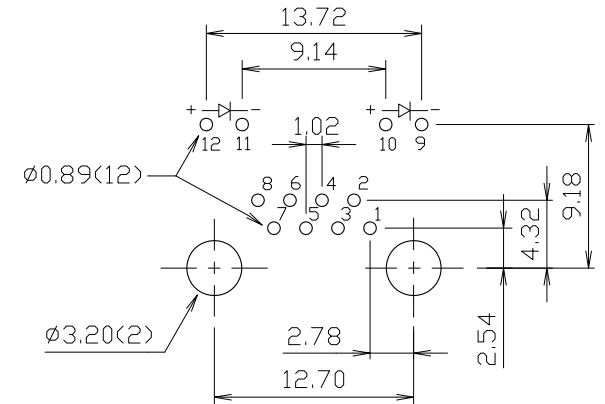

PCB LAYOUT
Ref.

DO NOT SCALE
DRAWING

TOLERANCES UNLESS
OTHERWISE NOTED

INCH

MM

DR.

M.L.HUANG

DATE

SEP-15 '10

XMULTIPLE

THIRD ANGLE PROJECTION

LINEAR $\frac{\text{MM}}{\text{INCH}}$

00 ± .01
000 ± .005
0000 ± .002

0.0 ± 0.25
0.00 ± 0.13
0.000 ± 0.05

CK'D

M.CHANG

SEP-15 '10

TITLE

RJ45, WITH LED'S
FLAT PIN, SIDE ENTRY JACK

MM
INCH

ANGLE ± 0° 30'

RADII

+ 0.40
- 0.15

APP'D

W.J.YANG

SEP-16 '10

SCALE SIZE DWG.NO.

XMM-9714-8813-L17-E-IM-MBS