
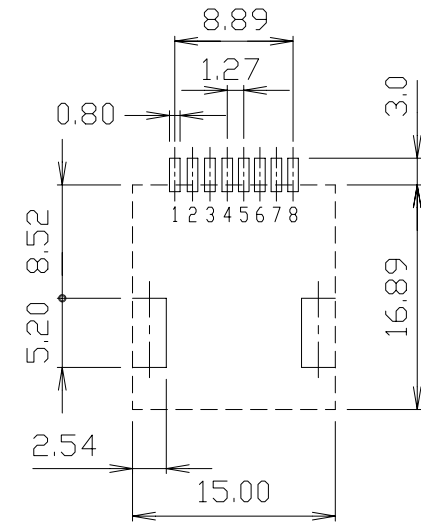
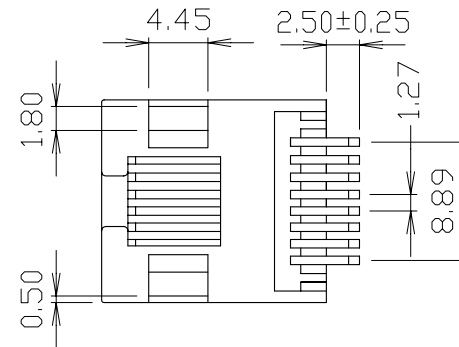
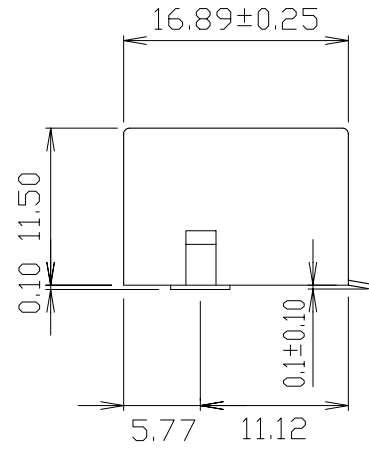
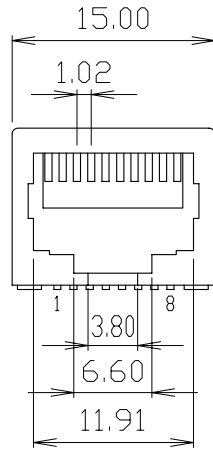


# RoHS Compliance

COPLANARITY:  
THE MAXIMUM DISTANCE BETWEEN LOWEST AND HIGHEST PIN WHEN HOUSING RESTS ON A FLAT SURFACE



PCB LAYOUT Ref.

## MATERIALS:

- HOUSING-PA9T GN2330  
HEAT RESISTANT PLOYAMIDE RESIN  
BLACK COLOR, UL94V-0
- CONTACTS-0.35mm THICK PHOS-BRONZE PLATED  
WITH 50 $\mu$ " HARD GOLD AND GOLD FLASH  
IN SOLDER AREA.
- HOLD DOWN-0.30mm THICK COPPER ALLOY,  
PLATED WITH TIN.  
CAVITY CONFIRMS TO FCC RULES AND REGULATIONS  
PART 68,SUBPART F.

DO NOT SCALE  
DRAWING

TOLERANCES UNLESS  
OTHERWISE NOTED

INCH


MM

DR.

CIAN.CI.LUO

DATE

DEC-24 '08



THIRD ANGLE PROJECTION

LINEAR  $\frac{\text{MM}}{\text{INCH}}$

00 ± .01  
000 ± .005  
0000 ± .002

0.0 ± 0.25  
0.00 ± 0.13  
0.000 ± 0.05

CK'D

M.CHANG

DEC-24 '08

TITLE 10PDS. 8 CONTACTS, SOLDER TAB-INSIDE  
LOW PROFILE 1 PORT, SIDE ENTRY SMT TYPE

MM  
INCH

ANGLE ± 0° 30'

RADII

+ 0.40  
- 0.15

APP'D

W.J.YANG

DEC-25 '08

SCALE SIZE DWG.NO.  
XMK-9700-10813-LFG

# XMULTIPLE