
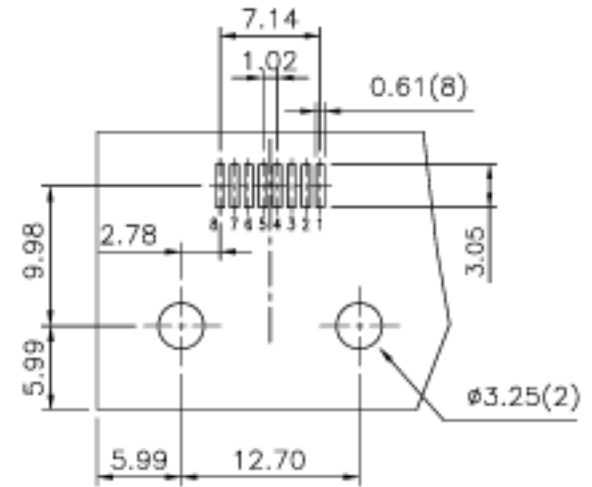
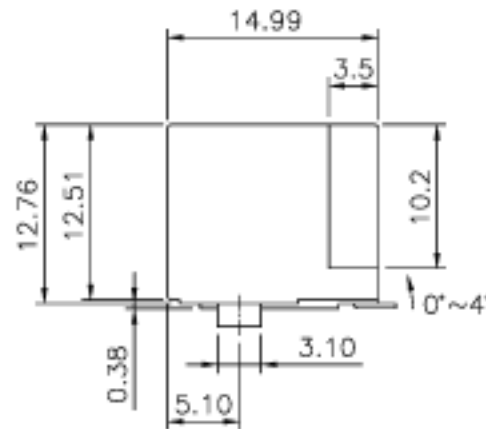


# RoHS Compliance

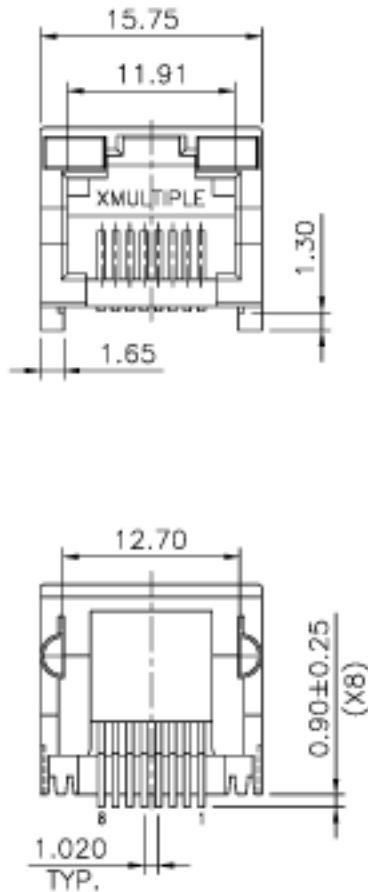

**PCB LAYOUT**  
Ref.

**MATERIAL:**  
 • HOUSING—PA9T GN2330  
 HEAT RESISTANT PLOYAMIDE RESIN  
 BLACK COLOR, UL94V-0  
 • INSERT HOUSING—DSM STANYL TE250F8 (NYLON-46)  
 HEAT DEFLECTION TEMP.290°  
 BLACK COLOR, UL94V-0.  
 • CONTACTS—0.35mm THICK PHOS-BRONZE PLATED  
 WITH GOLD FLASH AND GOLD FLASH IN  
 SOLDER AREA.  
 CAVITY CONFIRMS TO FCC RULES AND REGULATIONS  
 PART 68,SUBPART F.

DO NOT SCALE DRAWING	TOLERANCES UNLESS OTHERWISE NOTED	INCH	MM	DR. <i>CIAN.CI.LUO</i>	DATE NOV-18 '09	<b>XMULTIPLE</b>
THIRD ANGLE PROJECTION	LINEAR	$\frac{\text{MM}}{\text{INCH}}$	$00 \pm 0.000 \pm 0.000 \pm$ $0.0 \pm 0.25$ $0.00 \pm 0.20$ $0.000 \pm 0.10$	CK'D <i>M.CHANG</i>	NOV-18 '09	
$\frac{\text{MM}}{\text{INCH}}$	ANGLE $\pm 0' 30'$	RADII	$\pm 0.40$ $- 0.15$	APP'D <i>W.J.YANG</i>	NOV-19 '09	SCALE SIZE DWG.NO. XMS-9756-8814-A-LFG