
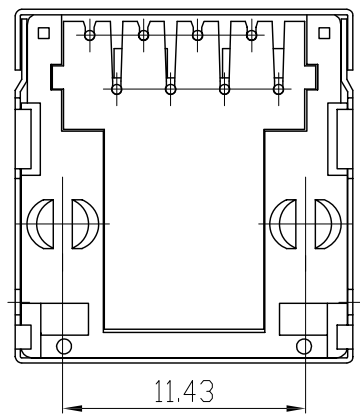
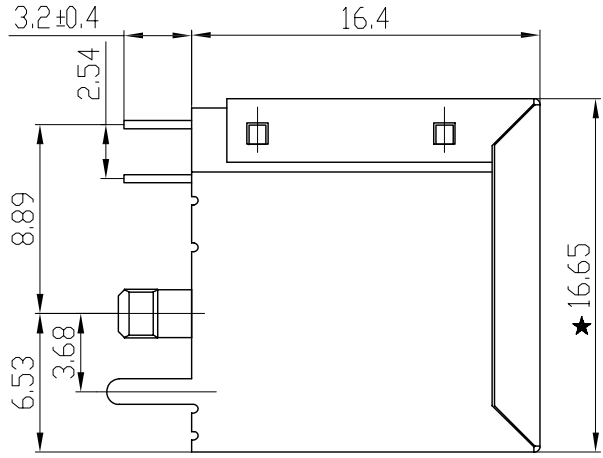


REV.	ECN. NO.	NAME	DATE
A	NEW	Bob Zou	2010/10/10

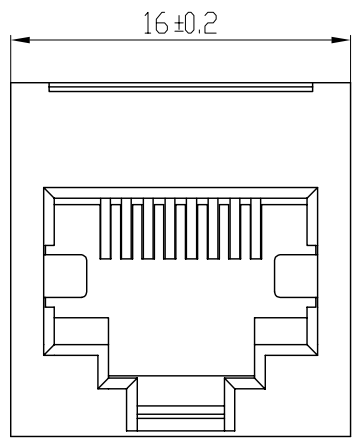


- NOTES:**
- MECHANICAL:
HOUSING: PBT, BLACK, UL 94V-0
CONTACTS: DIAMETER 0.45MM PHOSPHOR BORNZE, GOLD PLATING OVER NICKEL
SHIELD: 0.2MM THICKNESS BRASS WITH TIN PLATED
 - JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F
 - UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]

XMV-SC216-5224S-8P8C-X

XMV Series PART NUMBER CONTACTS GOLD PLATED

1: 15 u"
2: 30 u"
3: 50 u"
4: 6u"
5: 3u"
6: GOLD FLASH

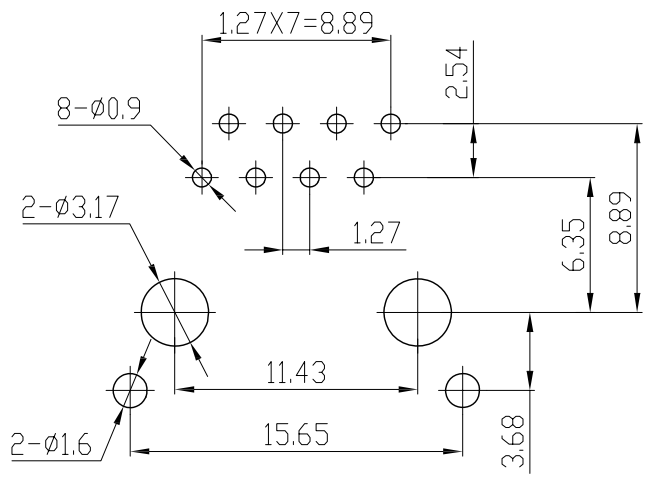

SUGGESTED PCB LAYOUT
TOP VIEW
DIMENSIONAL TOLERANCE: .XX ±0.08[0.003]

TOLERANCE	UNSPECIFIED
.0	± 0.50
.0	± 0.38
.00	± 0.25
.000	± 0.10
ANGLE	± 3°
CUSTOMER	COPY



TITLE: RJ45 Connectors, 8P, 10C, WITH OUT LED
Shielded/Thru Hole/10/100 Mbps FILTER

DRAWING	Bob Zou	SIZE: A4	UNIT: mm	PART NO.: XMV-SC216-5224S-8P8C-X
CHECKED		SCALE: FREE	PROJECTION	REV.: A
APPROVED	Bob Zou	DWG. PATH	C/XMV-SC216-5224S-8P8C-X	SHEET: 1 of 1