

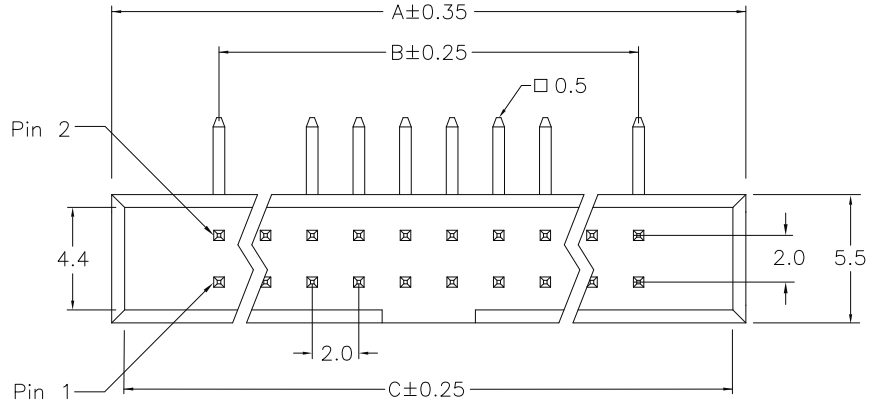




REV.	SPECIFICATION	ECN NO.	APPD.



Material:
Housing: High Temperature Plastic UL94V-0.
Contacts: Copper Alloy.
Electrical Characteristics:
Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 500V For 1 minute.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 20mΩ max. at DC 100mA.
Operating Temperature: -40°C~+105°C.
***RoHS Compliant**

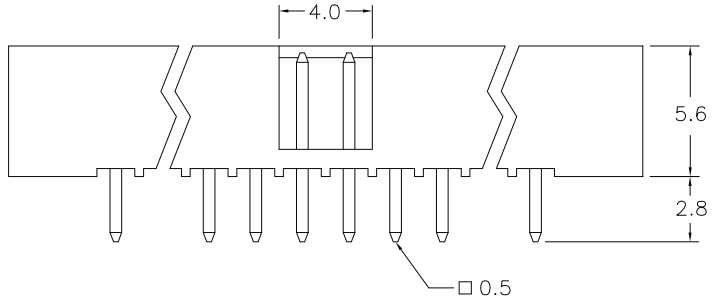

Position	Dimension		
	A	B	C
6	13.20	4.00	12.10
8	15.20	6.00	14.10
10	17.20	8.00	16.10
12	19.20	10.00	18.10
14	21.20	12.00	20.10
16	23.20	14.00	22.10
20	27.20	18.00	26.10
24	31.20	22.00	30.10
26	33.20	24.00	32.10
30	37.20	28.00	36.10
32	39.20	30.00	38.10
34	41.20	32.00	40.10
40	47.20	38.00	46.10
44	51.20	42.00	50.10
50	57.20	48.00	56.10
60	67.20	58.00	66.10
64	71.20	62.00	70.10
68	75.20	66.00	74.10

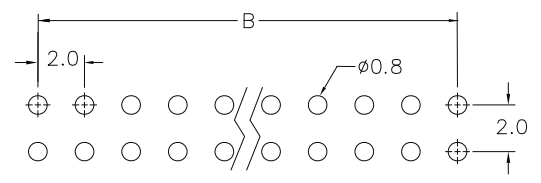

P.C. Board Layout

3112-xx G xx S B A
 Series No. of Pin Count G: Gold Plated 00: G/F 10: 10 μ" 15: 15 μ" 30: 30 μ" S: Straight R: Right Angle B: Black A: Tray Package

Tolerances	Dwg. No.	3112D01001	Title:	
x = ±0.5	Projection		3112 Series	
.x = ±0.25	Unit	mm	Scale	1:1
.xx = ±0.15	Drawn By	ZJJ 11/09'11	Box Header 2.0mm	

① 535

Xmultiple			
P/N: XPHD-3112-06G00SBA			
SHEET	1/1	Ver.No.	A6