


RECOMMENDED MOUNTING HOLE

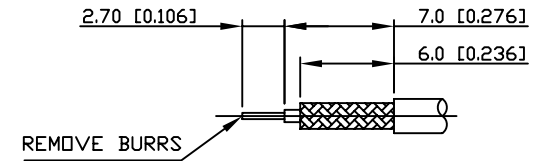

RECOMMENDED CABLE STRIPPING DIM'S

NOTES:

1. THIS CONNECTOR IS MCX BULKHEAD JACK FOR RG-174/U&RG-316/U.
2. ITEMS ④⑤⑥⑦ ARE SHIPPED UNASSEMBLED.
5. UNSPECIFIED TOLERANCE: .XX ±0.25 [0.010]  
.X ±0.30 [0.012]

RoHS Compliant

ITEM	NAME	SPEC.	FINISH	Q'TY
7	FERRULE	BRASS	GOLD OVER NICKEL	1
6	SOCKET CONTACT	BERYLLIUM COPPER	GOLD OVER NICKEL	1
5	NUT	BRASS	GOLD OVER NICKEL	1
4	WASHER	BRASS	GOLD OVER NICKEL	1
3	GUIDE PIECE	BRASS	GOLD OVER NICKEL	1
2	INSULATOR	PTFE	NONE	1
1	BODY	BRASS	GOLD OVER NICKEL	1

X MULTIPLE			CONNECTING THE INFORMATION AGE	
X MULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu, Taipei, Taiwan 11475		X MULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065		G/NO:
THIS DRAWING IS A CONTROLLED DOCUMENT.				DWG NO: XRF-M3-5R7-CAA-K01
TITLE: MCX BULKHEAD JACK				DRAWN: TQM
PART NO: XRF-M3-5R7-CAA-K01				CHKD: JEFF
UNIT mm [Inch]		SHEET 1 of 1		REV 01
DATE: Jan.24,08				