

1 2 3 4 5 6 7 8

A

B

C

D

E

F

A




B

C

D

E

F

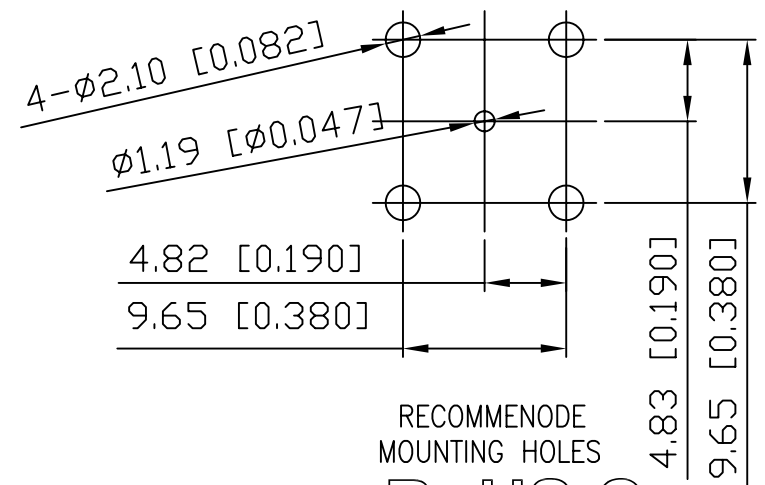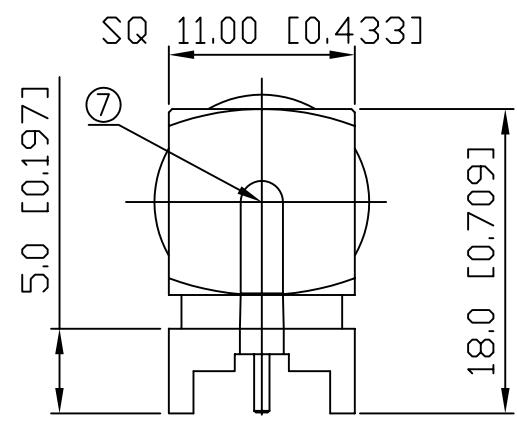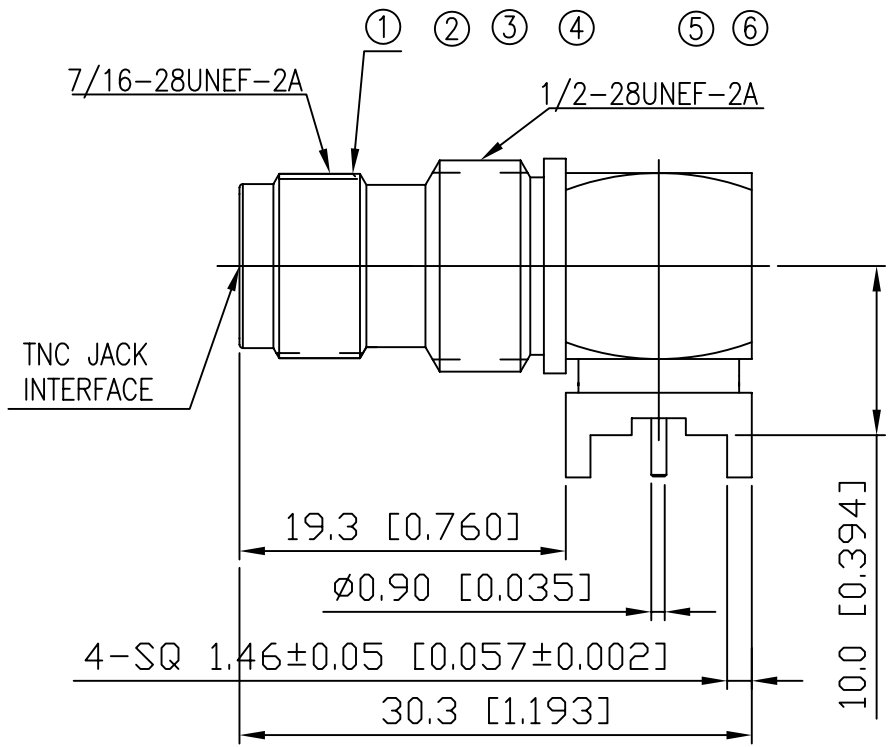

- NOTES:
- THIS IS TNC RIGHT ANGLE JACK FOR PCB.
 - ELECTRICAL SPEC:
 - IMPEDANCE: 50 OHMS NOMINAL.
 - FREQUENCY RANGE: 0~3 GHz.
 - INSULATOR RESISTANCE: 1000 MEGOHMS.
 - DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS.
 - CONTACT RESISTANCE:
 - CENTER CONTACT: 1.5 MILLIOHMS MAX.
 - OUTER CONTACT: 1.0 MILLIOHMS MAX.
 - MECHANICAL SPEC:
 - MATING: 7/16-28UNEF THREAD.
 - DURABILITY: 500 CYCLES MIN.
 - UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]

RoHS Compliant

7	SLIT BOLT	ZINC-ALLOY	NICKEL	1
6	INSULATOR 2	PTFE	NONE	1
5	BODY	BRASS	NICKEL	1
4	SOCKET CONTACT	BRASS	GOLD 0.08um MIN OVER NICKEL	1
3	RING	BRASS	NICKEL	1
2	INSULATOR 1	PTFE	NONE	1
1	JACK BODY	ZINC ALLOY	NICKEL	1
ITEM	NAME	SPEC.	FINISH	Q'TY

X MULTIPLE		THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu, Taipei, Taiwan 11475		XMULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065	
THIS DRAWING IS A CONTROLLED DOCUMENT.		G/NO:	
TITLE: TNC RA JACK		DWG NO: XRF-T1-4P2-CDA-K01	
PART NO: XRF-T1-4P2-CDA-K01		DRAWN: LEDN	
		UNIT	SHEET
		mm[inch]	1 of 1
		REV	DATE:
		01	Jan.31,08

1 2 3 4 5 6 7 8