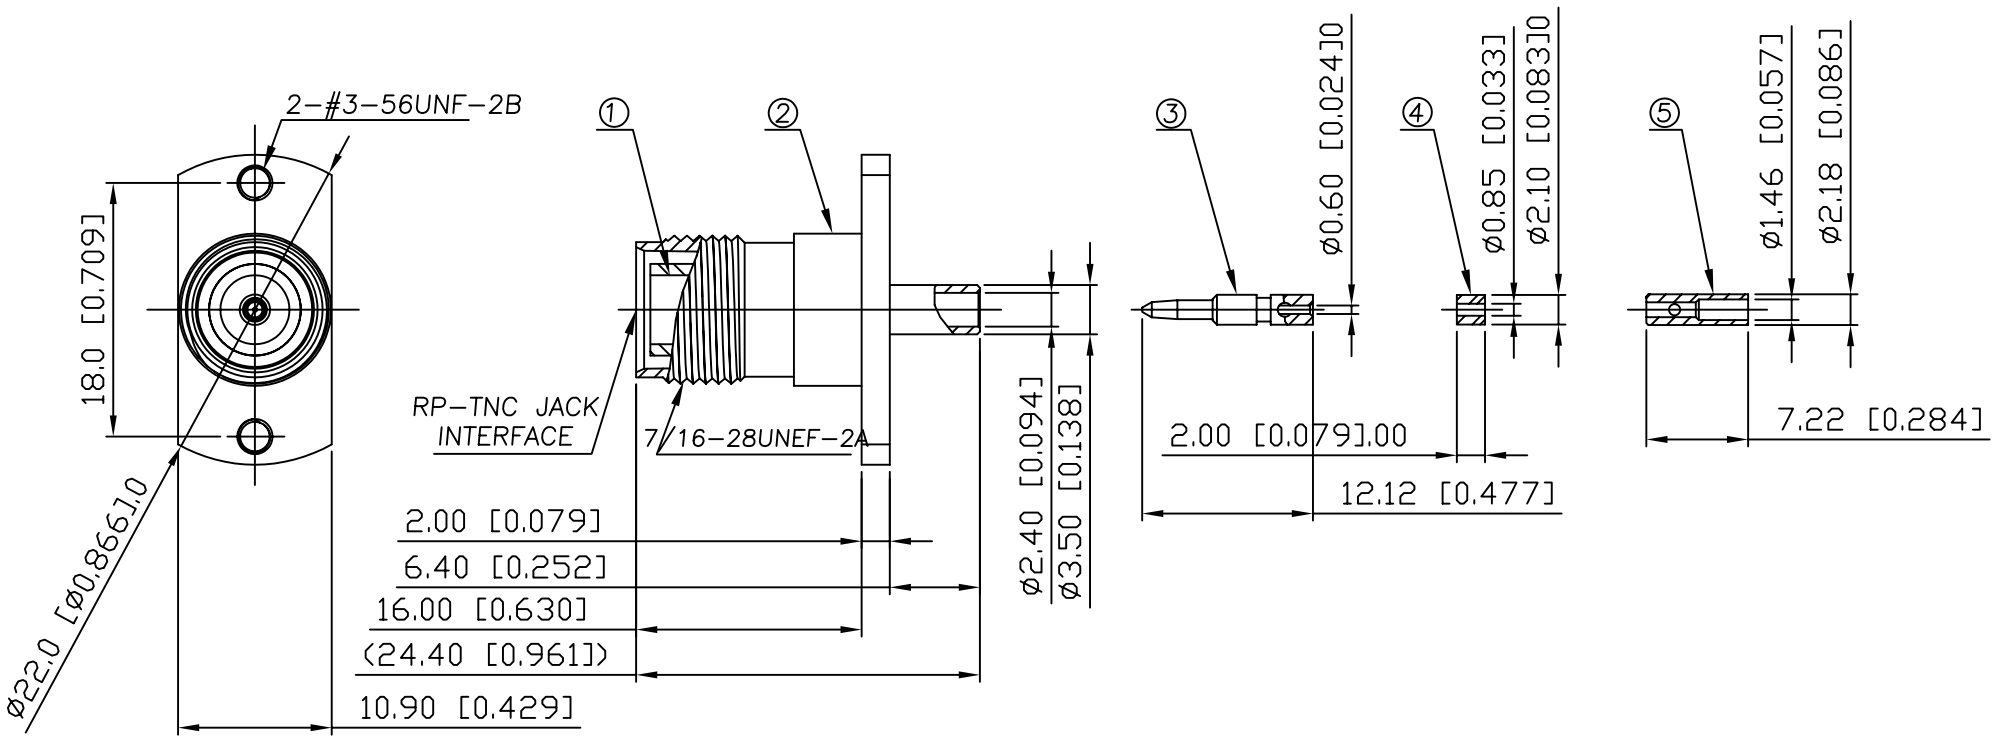

NOTES:

1. THIS CONNECTOR IS RP-TNC JACK WITH 2-HOLE FLANGE FOR OD 1.13.
2. ITEMS ③ ④ ⑤ ARE SHIPPED UNASSEMBLED.
3. ELECTRICAL SPEC:
   - 3.1 IMPEDANCE: 50 OHMS NOMINAL.
   - 3.2 FREQUENCY RANGE: 0~6 GHz.
   - 3.2 INSULATOR RESISTANCE: 1000 MEGOHMS.
   - 3.2 WITHSTANDING VOLTAGE: 1000 VRMS.
   - 3.3 CONTACT RESISTANCE:
     - 3.3.1 CENTER CONTACT: 1.5 MILLIOHMS MAX.
     - 3.3.2 OUTER CONTACT: 1.0 MILLIOHMS MAX.
4. MECHANICAL SPEC:
   - 4.1 MATING: 7/16-28UNEF THREAD.
   - 4.2 DURABILITY: 500 CYCLES MIN.
5. UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
   .X ±0.30[0.012]

ITEM	NAME	SPEC.	FINISH	Q'TY
5	FERRULE	BRASS	NICKEL	1
4	INSULATOR 2	PTFE	NONE	1
3	PIN CONTACT	BRASS	GOLD 0.08um MIN OVER NICKEL	1
2	MAIN BODY	BRASS	NICKEL	1
1	INSULATOR 1	PTFE	NONE	1

RoHS Compliant

XMULTIPLE — THE INFORMATION AGE

XMULTIPLE ASIA
4F, No. 347,Yang Guang St.,
Neihu , Taipei , Taiwan 11475

XMULTIPLE USA
1420 Los Angeles Ave., Suite G,
Simi Valley, CA 93065

G/NO:

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWG NO: XRF-T1-BH2-CDA-K02

TITLE: RP-TNC JACK

DRAWN: LEON

PART NO: XRF-T1-BH2-CDA-K02

CHKD: JEFF

UNIT	SHEET	REV
mm[inch]	1 of 1	01

DATE: Jan.28,08