


RECOMMENDED
PANEL CUTOUT DIMENSION

SUGGESTED PCB LAYOUT
TOP VIEW
DIMENSIONAL TOLERANCE: .XX ±0.08[0.003]

NOTES:

- MATERIALS:
HOUSING: HIGH TEMP. THERMOPLASTIC, NYLON, UL 94V-0, BLACK.
CONTACTS: PHOS-BRONZE PLATED WITH 6u" GOLD.
SHIELD: BRASS PLATED WITH NICKEL.
- OPERATING TEMPERATURE: -40°C ~ +85°C
- CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.
- UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]

XRJD-1S-21-8-8-0-AA4

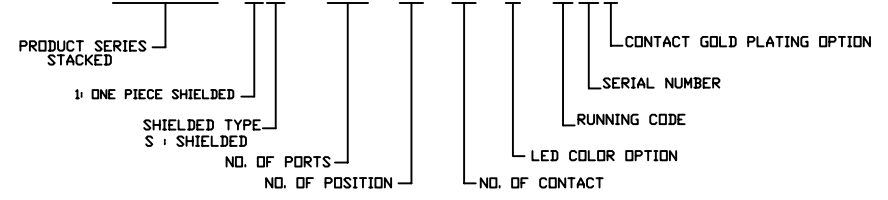

RoHS Compliant

X MULTIPLE		CONNECTING THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu, Taipei, Taiwan 11475		XMULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065	
THIS DRAWING IS A CONTROLLED DOCUMENT.		G/NO:	
TITLE: STACKED RJ45 CONNECTORS, W/LED, 8P,8C, SHIELDED, THRU HOLE		DWG NO: XRJD-1S-21-8-8-0-AA4	
PART NO: XRJD-1S-21-8-8-0-AA4		DRAWN: LEON	
		UNIT mm[inch]	SHEET 1 of 1
		REV 01	DATE: Mar.12,09