

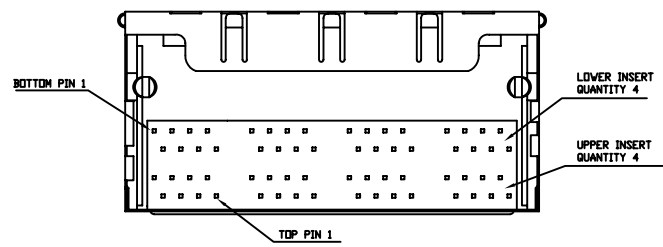


**NOTES:**

1. MATERIALS:  
TOP HOUSING-PBT POLYESTER UL94V-0  
MIXED GLASS FIBER, BLACK COLOR.  
CONTACTS-0.35mm THICK PHOS-BRONZE PLATED WITH HARD GOLD AND GOLD FLASH IN SOLDER AREA.  
SHIELD-0.25mm THICK COPPER ALLOY, PLATED WITH NICKEL.
2. OPERATING TEMPERATURE: -40°C~+85°C
3. CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68,SUBPART F.
4. UNSPECIFIED TOLERANCE: .XX ±0.25  
.X ±0.30

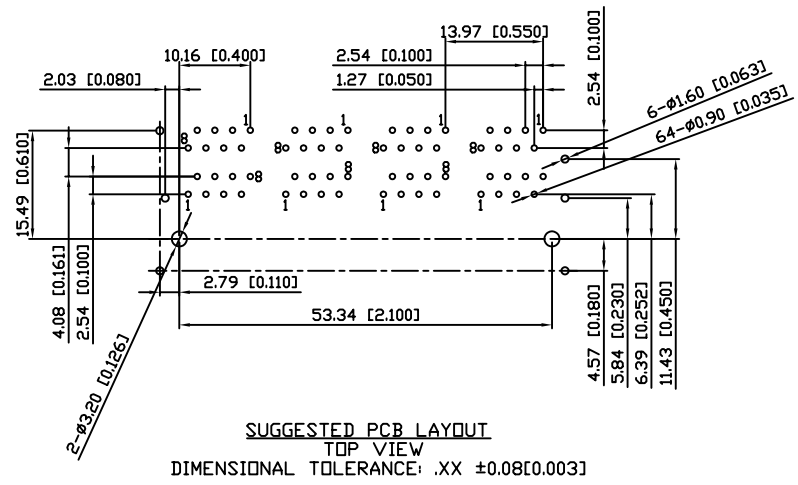

RECOMMENDED PANEL CUTOUT DIMENSION

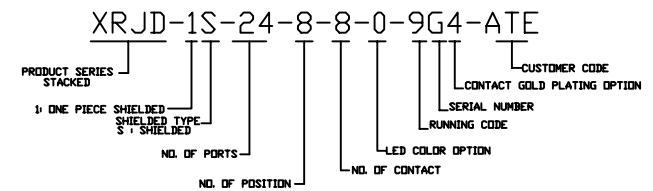

**RoHS Compliant**

<b>X MULTIPLE</b>		THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu, Taipei, Taiwan 11475		XMULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065	
THIS DRAWING IS A CONTROLLED DOCUMENT.		G/NO: DWG NO: XRJD-1S-24-8-8-0-9G4-ATE	
TITLE: Stacked RJ45 Connectors, W/D LED, 8P,8C, Shielded, Thru Hole, Structure		DRAWN: LEON	
PART NO: XRJD-1S-24-8-8-0-9G4-ATE		CHKD: TARA	
		UNIT mm[inch]	SHEET 1 of 1
		REV 01	DATE: Jun.22,09