



SUGGESTED PCB LAYOUT  
TOP VIEW  
DIMENSIONAL TOLERANCE: .XX ±0.08[0.003]

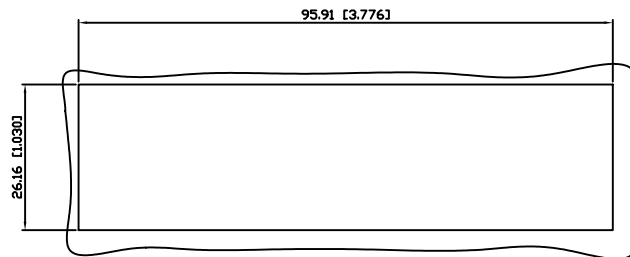

RECOMMENDED  
PANEL CUTOUT DIMENSION

XRJD-1S-26-8-8-5-9B4

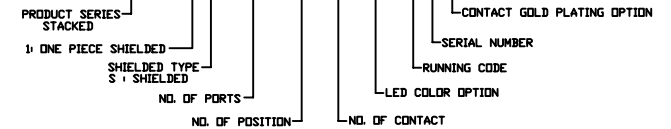

NOTES:

- MATERIALS:  
TOP HOUSING: PBT POLYESTER UL94V-0  
MIXED GLASS FIBER, BLACK COLOR.  
BOTTOM HOUSING: DSM STANYL TE250F6 (NYLON-46)  
BLACK COLOR, UL94V-0  
CONTACTS: 0.35mm THICK PHOS-BRONZE PLATED  
50µ" NICKEL UNDERPLATE ON ALL AREA,  
WITH 6µ" GOLD AND GOLD FLASH  
IN SOLDER AREA.  
SHIELD: 0.25mm THICK COPPER ALLOY,  
PLATED WITH NICKEL.
- OPERATING TEMPERATURE: -40°C~+85°C
- CAVITY CONFORMS TO FCC RULES AND REGULATIONS  
PART 68, SUBPART F.
- UNSPECIFIED TOLERANCE: .XX ±0.25 [0.010]  
.X ±0.30 [0.012]

RoHS Compliant

X MULTIPLE		THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu, Taipei, Taiwan 11475		XMULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065	
THIS DRAWING IS A CONTROLLED DOCUMENT.		G/NO:	9766
TITLE: Stacked RJ45 Connectors, W/LED, 8P,8C, Shielded, Thru Hole		DWG NO:	XRJD-1S-26-8-8-5-9B4
PART NO: XRJD-1S-26-8-8-5-9B4		DRAWN:	IVAN
		CHKD:	TARA
UNIT: mm[inch]		SHEET: 1 of 1	DATE: Jun.11.08
REV: A			