



SUGGESTED PCB LAYOUT  
TOP VIEW  
DIMENSIONAL TOLERANCE: .XX ±0.08[0.003]

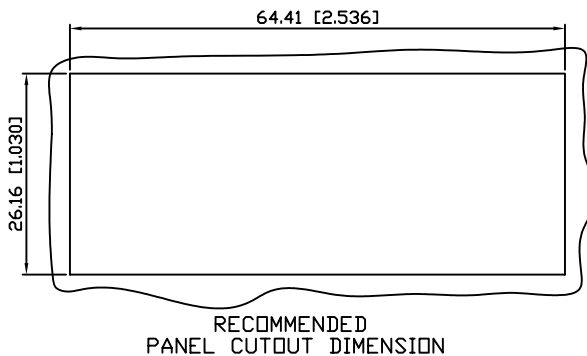

NOTES:

- MATERIALS:  
TOP HOUSING-PBT POLYESTER UL94V-0  
MIXED GLASS FIBER, BLACK COLOR.  
BOTTOM HOUSING-DSM STANYL TE250F6 (NYLON-46)  
UL94V-0, BLACK COLOR  
CONTACTS-0.35mm THICK PHOS-BRONZE C5210H PLATED  
50u' NICKEL UNDERPLATE ON ALL AREA,  
WITH 15u' HARD GOLD AND GOLD FLASH  
IN SOLDER AREA.  
SHIELD-0.25mm THICK COPPER ALLOY,  
PLATED WITH NICKEL.
- OPERATING TEMPERATURE: -40°C~+85°C
- CAVITY CONFORMS TO FCC RULES AND REGULATIONS  
PART 68,SUBPART F.
- UNSPECIFIED TOLERANCE: .XX ±0.25 [0.001]  
.X ±0.30 [0.011]

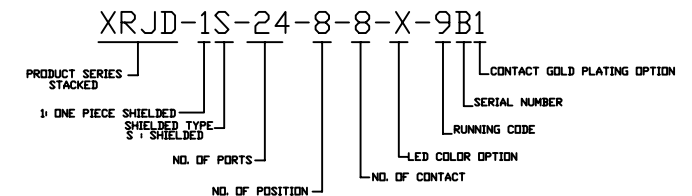

RoHS Compliant

X MULTIPLE		THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu, Taipei, Taiwan 11475		XMULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065	
THIS DRAWING IS A CONTROLLED DOCUMENT.		G/NO: DWG NO: XRJD-1S-24-8-8-X-9B1	
TITLE: Stacked RJ45 Connectors, w/LED, 8P,8C, Shielded, Thru Hole.		DRAWN: LEON	
PART NO: XRJD-1S-24-8-8-X-9B1		CHKD: JEFF	
		UNIT mm[inch]	SHEET 1 of 1
		REV 01	DATE: Aug.10,07