



SUGGESTED PCB LAYOUT
TOP VIEW
DIMENSIONAL TOLERANCE: .XX ±0.08 [0.003]

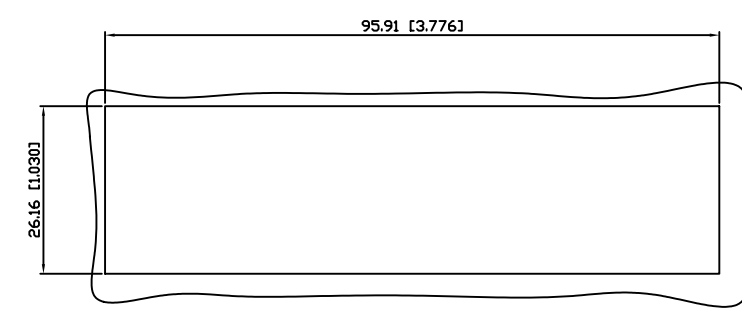

RECOMMENDED
PANEL CUTOUT DIMENSION

NOTES:

- MATERIALS:
TOP HOUSING-PBT POLYESTER UL94V-0
MIXED GLASS FIBER, BLACK COLOR.
BOTTOM HOUSING-DSM STANYL TE250F6 (NYLON-46)
BLACK COLOR,UL94V-0
CONTACTS-0.35mm THICK PHOS-BRONZE C5210H PLATED
50u" NICKEL UNDERPLATE ON ALL AREA,
WITH 15u" GOLD AND GOLD FLASH
IN SOLDER AREA.
SHIELD-0.25mm THICK COPPER ALLOY,
PLATED WITH NICKEL.
- OPERATING TEMPERATURE: -40°C~+85°C
- CAVITY CONFORMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.
- UNSPECIFIED TOLERANCE: .XX ±0.25 [0.010]
.X ±0.30 [0.012]

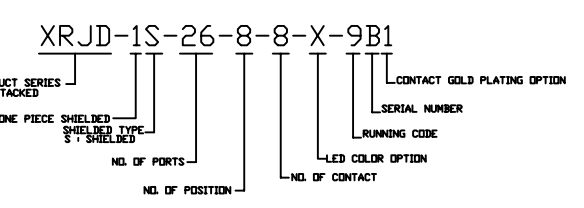

RoHS Compliant

X MULTIPLE		THE INFORMATION AGE	
MULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu, Taipei, Taiwan 11475		MULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065	
THIS DRAWING IS A CONTROLLED DOCUMENT.		G/NO:	
TITLE: Stacked RJ45 Connectors, W/LED,8P,8C, Shielded, Thru Hole		DWG NO: XRJD-1S-26-8-8-X-9B1	
PART NO: XRJD-1S-26-8-8-X-9B1		DRAWN: LEON	
UNIT: mm[inch]		SHEET: 1 of 1	
REV: 01		DATE: Aug.10,07	
CHKD: JEFF			