


XRJD-1S-28-8-8-0-9G1


PRODUCT SERIES  
 STACKED  
 1: ONE PIECE SHIELDED SHIELDED TYPE S: SHIELDED  
 NO. OF PORTS  
 NO. OF POSITION  
 NO. OF CONTACT  
 CONTACT GOLD PLATING OPTION  
 SERIAL NUMBER  
 RUNNING CODE  
 LED COLOR OPTION

NOTES:

- MATERIALS:  
 HOUSING: PBT POLYESTER UL-94V-0, STANDARD COLOR-BLACK MIXED GLASS FIBER.  
 CONTACTS: 0.35mm THICK PHOS-BRONZE, PLATED WITH 15u' GOLD AND GOLD FLASH IN SOLDER AREA.  
 SHIELD: 0.25mm THICK COPPER ALLOY, PLATED WITH NICKEL.
- OPERATING TEMPERATURE: -40°C ~ +85°C
- CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.
- UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]  
 .X ±0.30[0.012]

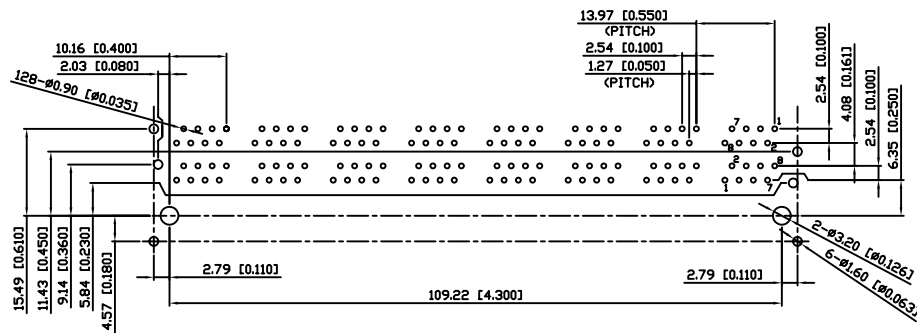

SUGGESTED PCB LAYOUT  
 TOP VIEW  
 DIMENSIONAL TOLERANCE: .XX ±0.08[0.003]

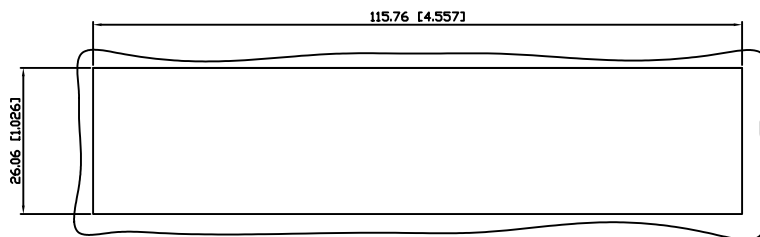

RECOMMENDED  
 PANEL CUTOUT DIMENSION

RoHS Compliant

X MULTIPLE		THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu, Taipei, Taiwan 11475		XMULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065	
G/NO:		9731	
THIS DRAWING IS A CONTROLLED DOCUMENT.			
TITLE:		Stacked RJ45 Connectors, w/o LED, 8P,8C, Shielded, Thru Hole.	
PART NO:		XRJD-1S-28-8-8-0-9G1	
DRAWN:		IVAN	
CHKD:		TARA	
DATE:		May.05.09	
UNIT		SHEET	
mm[inch]		1 of 1	
REV		01	