


RECOMMENDED PCB LAYOUT
TOP VIEW

NOTES:

- MATERIALS:
HOUSING-PBT POLYESTER UL-94V-0
MIXED GLASS FIBER,
STANDARD COLOR-BLACK
CONTACTS-0.35mm THICK PHOS-BRONZE
PLATED WITH 30u" GOLD
AND TIN IN SOLDER AREA.
SHIELD-0.25mm THICK COPPER ALLOY,
PLATED WITH NICKEL.
- CAVITY CONFIRMS TO FCC RULES AND
REGULATIONS PART 68,SUBPART F.
- UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]

XRJD-S-21-8-8-0-9A2

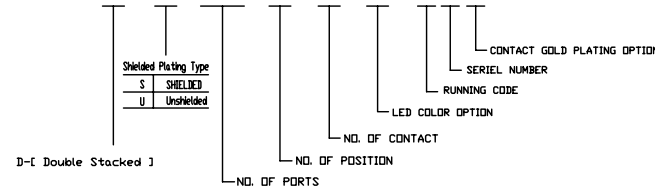

RoHS Compliant

				MULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu Chu, Taipei, Taiwan 11475
MULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065		G/NO:		
THIS DRAWING IS A CONTROLLED DOCUMENT.				DWG NO: XRJD-S-21-8-8-0-9A2
TITLE: 2X1 8 POSITIONS RIGHT ANGLE SHIELDED PCB JACK				DRAWN: TARA
PART NO: XRJD-S-21-8-8-0-9A2				CHKD: JEFF
		UNIT mm[inch]	SHEET 1 of 1	REV A
DATE: Feb.07,06				