


**XRJD-S-21-8-8-4-ALV**


PRODUCT SERIES: D - STACKED  
 SHIELDED TYPE: S - SHIELDED  
 NO. OF PORTS: 21  
 NO. OF CONTACT: 8  
 NO. OF POSITION: 8  
 LED COLOR OPTION: ALV  
 CUSTOMER CODE: V

**NOTES:**

- MATERIALS:  
 HOUSING: HIGH TEMP. THERMOPLASTIC, PBT, UL 94V-0, BLACK.  
 CONTACTS: T=0.35 mm PHOSPHOR BRONZE, 50u" NICKEL UNDERPLATE  
 ON ALL AREA, 100u" TIN ON TERMINATION END,  
 30u" GOLD ON CONTACT AREA.  
 SHIELD: T=0.25 mm COPPER ZINC ALLOY PLATED WITH NICKEL
- OPERATING TEMPERATURE: -40°C ~ +85°C
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F
- UNSPECIFIED TOLERANCE: .XX ±0.25(0.010)  
 .X ±0.30(0.012)

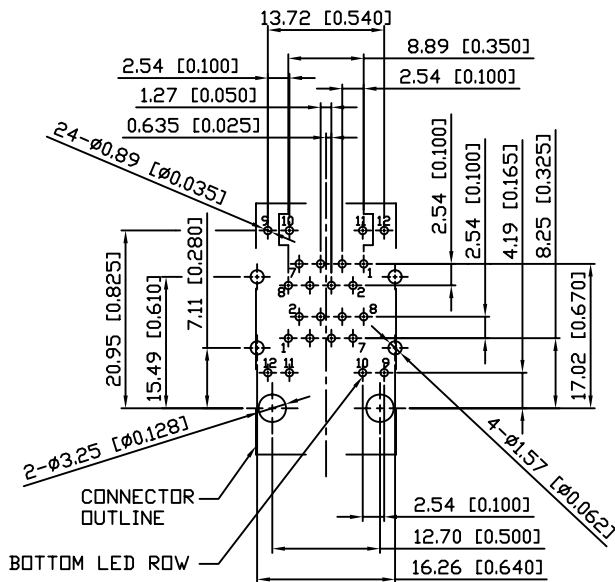

DIMENSIONAL TOLERANCE: .XX ±0.08(0.003)

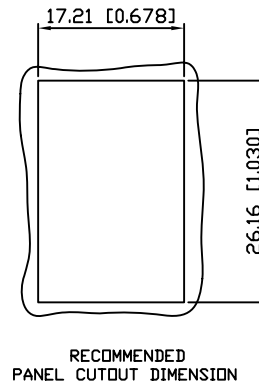

**RoHS Compliant**

<b>XMULTIPLE</b>		THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu, Taipei, Taiwan 11475		XMULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065	
THIS DRAWING IS A CONTROLLED DOCUMENT.		G/NO: DWG NO: XRJD-S-21-8-8-4-ALV	
TITLE: Stacked RJ45 Connectors, w/LED, 8P,8C, Shielded, Thru Hole, 2 Piece Structure		DRAWN: TOM	
PART NO: XRJD-S-21-8-8-4-ALV		CHKD: TARA	
		UNIT mm[inch]	SHEET 1 of 1
		REV 01	DATE: Apr.02,09