


LED SCHEMATIC

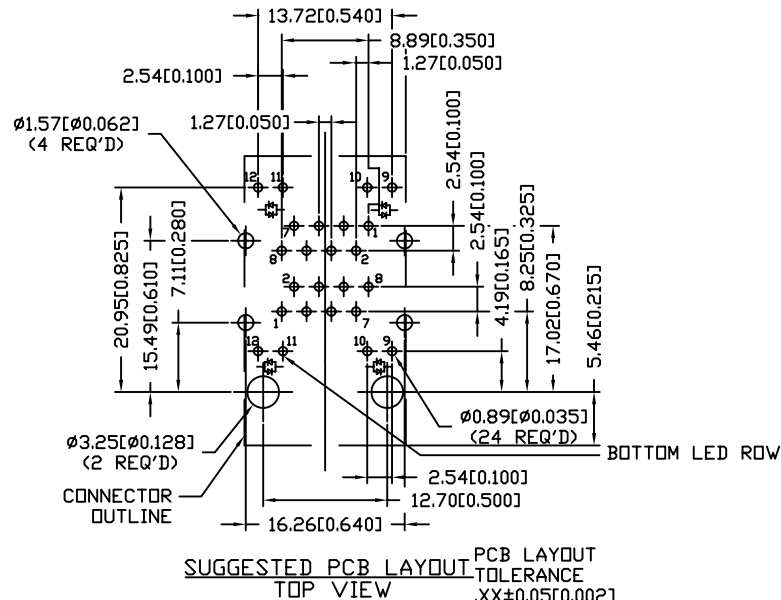

	CODE	LED 2 [LEFT]	LED 1 [RIGHT]
	0	BLOCKED	BLOCKED
	1	YELLOW	GREEN
	2	BLOCKED	GREEN
	3	YELLOW	BLOCKED
	4	GREEN	YELLOW
	5	GREEN	GREEN
	6	YELLOW	YELLOW
	7	OR/GR	OR/GR
☆	8	YE/GR	YE/GR
	9	OR/GR	YELLOW

NOTES:

- MATERIALS:  
HOUSING: HIGH TEMP. THERMOPLASTIC, PBT, UL 94V-0, BLACK  
CONTACTS: T=0.35 mm PHOSPHOR BORNZE, 50u" NICKEL UNDERPLATE ON ALL AREA, 150u" TIN-LEAD ON TERMINATION END, 3u" GOLD ON CONTACT AREA.  
SHIELD: T=0.25 mm COPPER ZINC ALLOY PLATED WITH NICKEL
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F
- UNSPECIFIED TOLERANCE: .XX ± 0.25 [0.010]  
.X ± 0.30 [0.012]

<h1>X MULTIPLE</h1>		CONNECTING THE INFORMATION AGE						
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu Chiu, Taipei, Taiwan 11475		XMULTIPLE USA 543 Country Club Drive #B 128 Simi Valley, CA 93065						
PART NO: XRJD-S-21-8-8-8		CUSTOMER/NO:						
THIS DRAWING IS A CONTROLLED DOCUMENT.								
TITLE: Stacked RJ45, Connectors, w/LED, 8P, 8C, Shielded, Thru Hole, 2 Piece Structure		DWG NO: XRJD-S-21-8-8-8						
		DRAWN: ANNIE						
		CHKD: JEFF						
		DATE: 23/08/04						
		<table border="1"> <tr> <th>DIMENSIONS</th> <th>SHEET</th> <th>REV</th> </tr> <tr> <td>mm[inch]</td> <td>1 of 1</td> <td>A</td> </tr> </table>	DIMENSIONS	SHEET	REV	mm[inch]	1 of 1	A
DIMENSIONS	SHEET	REV						
mm[inch]	1 of 1	A						