

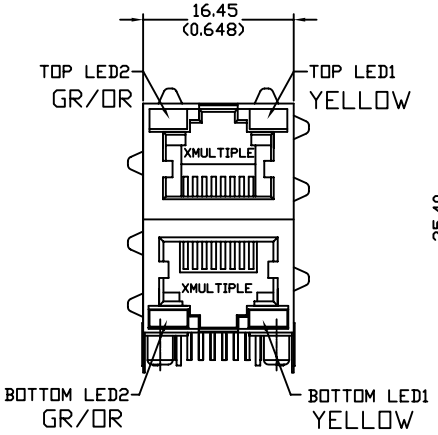

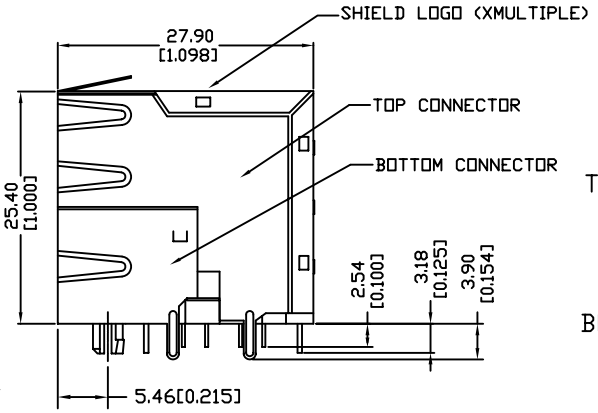

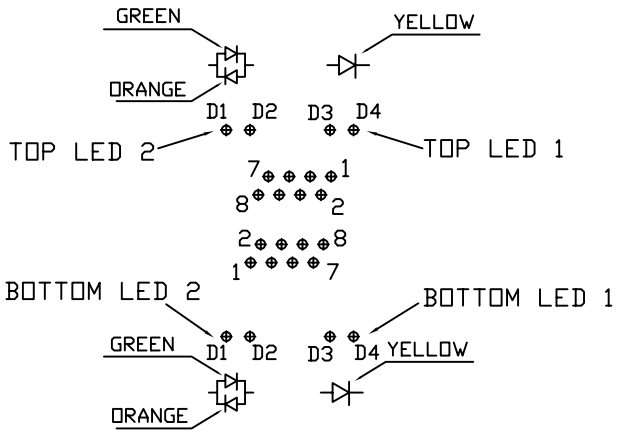

LED SCHEMATIC

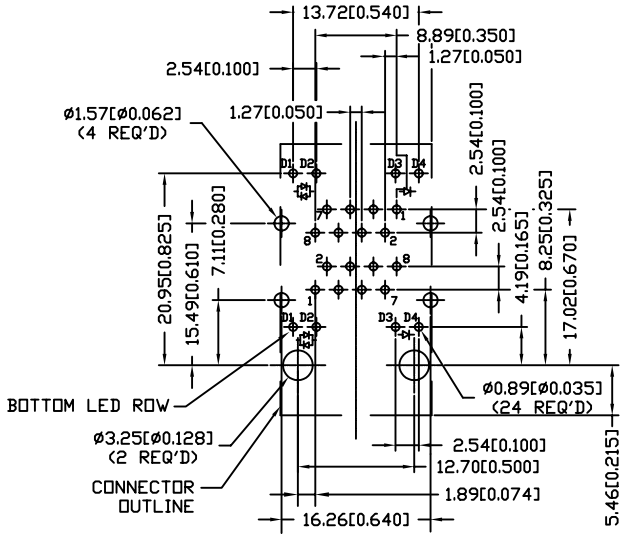

SUGGESTED PCB LAYOUT
TOP VIEW

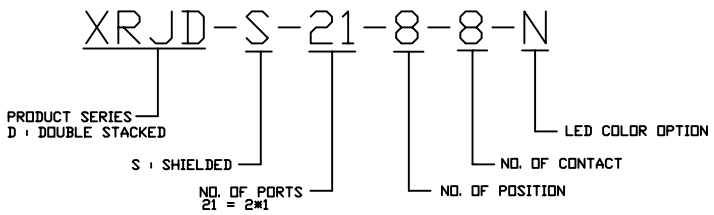

RoHS Compliant

NOTES:

1. MATERIALS:
   HOUSING: HIGH TEMP. THERMOPLASTIC, PBT, UL 94V-0, BLACK
   CONTACTS: T=0.35 mm PHOSPHOR BORNZE, 50u" NICKEL UNDERPLATE ON ALL AREA, 100u" TIN ON TERMINATION END, 15u" GOLD ON CONTACT AREA.
   SHIELD: T=0.25 mm COPPER ZINC ALLOY PLATED WITH NICKEL
2. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F
3. UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
   .X ±0.30[0.012]

XMULTIPLE — CONNECTING THE INFORMATION AGE

XMULTIPLE ASIA
4F, No. 347,Yang Guang St.,
Neihu Chiu , Taipei , Taiwan 11475

XMULTIPLE USA
1420 Los Angeles Ave., Suite G,
Simi Valley, CA 93065

THIS DRAWING IS A CONTROLLED DOCUMENT.

TITLE:	Stacked RJ45 Connectors, W/LED, 8P,8C, Shielded, Thru Hole, 2 Piece Structure.
PART NO:	XRJD-S-21-8-8-N
G/NO:	
DWG NO:	XRJD-S-21-8-8-N
DRAWN:	LEON
CHKD:	JEFF
DATE:	Oct.14,06

UNIT	SHEET	REV
mm[inch]	1 of 1	A