


NOTES:

1. MATERIALS:
 HOUSING:PA6T+30%G.F. UL94V-0 BLACK.
 COVER:PBT+30%G.F. UL94V-0 BLACK.
 SHIELD:0.20MM THICKNESS COPPER ALLOY NI PLATED
 CONTACT:0.45MM DIA PHOSPHOR BRONZE
 PLATED 30u" GOLD OVER NI

2. OPERATING TEMPERATURE: -40°C ~ +85°C
 3. JACK CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F
 4. UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
 .X ±0.30[0.012]

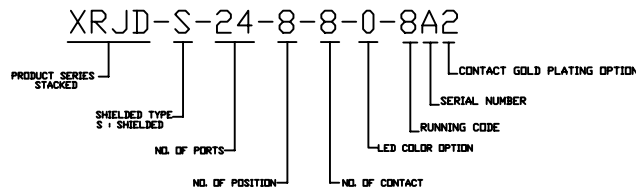

RoHS Compliant

X MULTIPLE		THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu, Taipei, Taiwan 11475		XMULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065	
THIS DRAWING IS A CONTROLLED DOCUMENT.		G/NO: DWG NO: XRJD-S-24-8-8-0-8A2	
TITLE: Stacked RJ45 Connectors, w/D LED, 8P,8C, Shielded, Thru Hole,		DRAWN: LEON	
PART NO: XRJD-S-24-8-8-0-8A2		CHKD: TARA	
		UNIT mm[inch] J	SHEET 1 of 1
		REV 01	DATE: Feb.12,09